


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:  
This corner was never established.



No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

See Map of Survey Number 028-1992.

Description of monument and accessories I established to perpetuate the original location of this corner:

At position, determined by survey I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which;


New Bearing Trees;

- A 10 inch diameter Tamarack bears N3°E, 41.77 feet marked E 1/16 S10 BT
- A 16 inch diameter Ponderosa pine bears S80°E, 35.13 feet marked E 1/16 S15 BT

Raised a small stone mound.  
Set a steel fence post approximately 5 feet East, with a 54-9 and a 54-2 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 31, 1992.

Witness: Jim Bennett  
Pete Crabtree  
Jeff Peterson

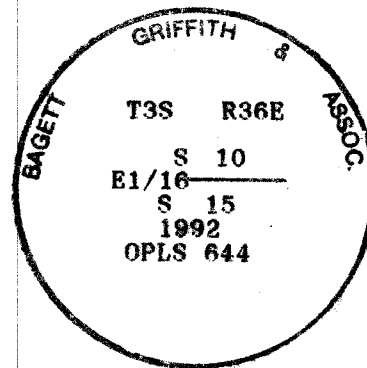

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of.....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY**  
by                     

---

Date Received 11/23/92  
Date Filed 11/29/92  
By                       
File No. 116-1992R

Form R6-7100-57 (9/71)

\*GPO-591-971, 1988