


UNION COUNTY  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John H. Hurlburt under GLO Contract Number 201, dated August 5, 1873. Surveyor General record states:  
Set post 4 inches square for ¼ Sec. Cor. from which;

A 15 inch diameter Pine bears S1°E, 67 Lks.  
A 24 inch diameter Pine bears N15°W 121 Lks.

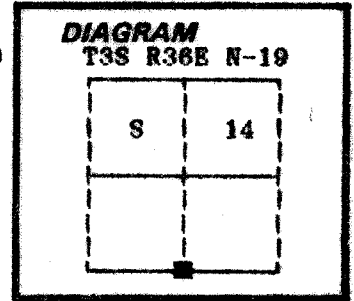

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of original corner monument.  
The area has been cleared.

See Map of Survey Number 028-1992.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the proportionate position, determined by survey I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which;


New Bearing Trees or Object;

- A 12 inch diameter Ponderosa pine bears N20°E, 117.82 feet marked ¼ S14 BT
- A 11 inch diameter Ponderosa pine bears N67°E, 137.12 feet marked X BT
- A 5/8" X 30" rebar with aluminum cap bears S8°E, 18.92 feet marked T3S R36E ¼ S23 RM 18.92 1992 OPLS 644.
- A 5/8" X 30" rebar with aluminum cap bears N74°W, 4.31 feet marked T3S R36E ¼ S23 RM 4.31 1992 OPLS 644.

Set a steel fence post approximately 3 feet West, with a 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 14, 1992.

Witness: Jim Bennett  
Pete Crabtree

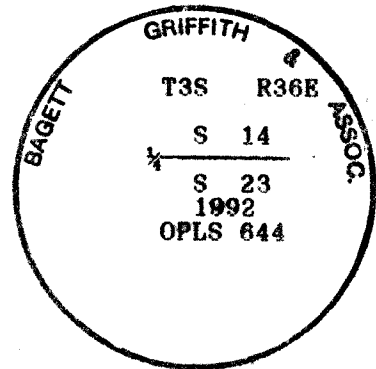

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Duane Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

**UNION COUNTY  
SURVEYOR**

---

Date Received 11/23/92

Date Filed 11/28/92

By *Greg Black*

File No. 132-1992R

N-19 6319