

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**History of original corner establishment:**

Corner originally established by John A. Hurlburt under GLO contract number 201, dated August 5, 1873. Surveyor General record states:

Set fir post 4 ft. long 3 in. thick 2 ft. in ground for ¼ sec cor  
 Fir 20 in dia S77°W 31 lks  
 Pine 12 in dia N83°E 37 lks

Corner found by J.W. Kimbrell, Union County Surveyor on survey for Robert Young dated December 4, 1888. His record states:

The ¼ sec corner bet Sec 21 & 22 from which  
 a Pine 14 inches dia hrs N88°E 35 lks dist  
 a fir 12 inches dia hrs S18°W 76 lks dist



No record of subsequent monumentation found in Union County survey records.

**Description of corner evidence found:**

Found no evidence of the original corner monument or it's accessories.

See Union County Survey Number 25-89

**Description of monument and accessories I established to perpetuate the**

**original location of this corner:** At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which;

New Bearing Trees;


A 20 inch diameter Ponderosa Pine bears S83°E, 5.62 feet marked ¼ S22 BT  
 A 14 inch diameter Western Larch bears S19°W, 41.81 feet marked ¼ S21 BT

Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.

Set a steel fencepost approximately 5 feet West with Land Survey Monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on October 2, 1989.

Witness: Jeff Petersen

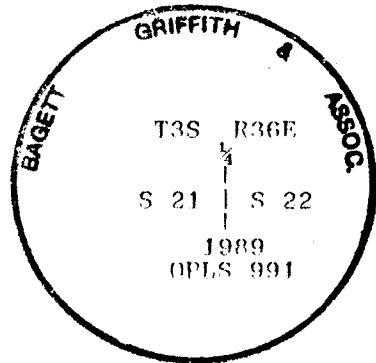

**REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR**

*Gregory T. Blackman*

**OREGON**  
 JULY 13, 1973  
**GREGORY T. BLACKMAN**  
 991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....  
 State of..... I hereby certify that the within instrument was filed in this office  
 for record on the..... day of.....

(COUNTY OFFICIAL)

**UNION COUNTY  
 SURVEYOR**  
 (DEPUTY)

---

Date Received 11-14-89  
 Date Filed 11-14-89  
 By R. ROBINSON, Deputy  
 File No. 205-89R

Form R6-7100-57 (9/71)

\*GPO-591-971, 1988

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200816

1/4 SECTION CORNER COMMON TO SECTIONS 21 and 22

TWP. 3 S. RGE. 36 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: November 5, 2008

LAT: 45 ° 17 ' 20.15251 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 18 ' 15.28810 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 599110.733 INT FT.

E: 8767115.759 INT FT.

TYPE: GPS

THETA: 1 ° 33 ' 25.9111508 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998967773

ELEV: 3503.14 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is a 2 1/2"x30" aluminum pipe  
with 2 1/2" aluminum cap marked:

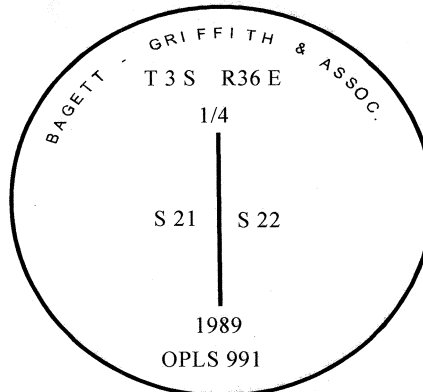

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)