


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by John A. Hurlburt under GLO contract number 201, dated August 5, 1873. Surveyor General record states:

Set basalt stone 18x12x10 8 in in ground and made stone mound 2 ft high for cor to see 22 23 26 and 27

Pine 18 in dia S74°E 287 lks  
No other near

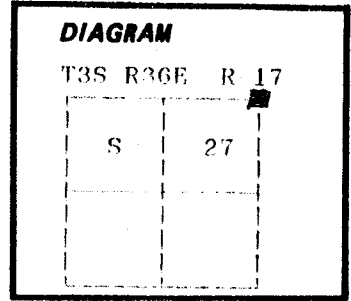

No record of subsequent monumentation found in Union County survey records

**Description of corner evidence found:**

Found a rock crib with fences running North and West at corner position. There are many stones of call size in the crib, but could not identify the original corner monument.

Found a 20 inch diameter Ponderosa Pine S74°E, 287 lks, dead down and rotting with no marks visible.

See Union County Survey Number 25-89

**Description of monument and accessories I established to perpetuate the**

**original location of this corner:**

At the Southeast corner of the rock crib, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which;

New Bearing Trees;

- A 20 inch diameter Ponderosa Pine bears N67°E, 42.55 feet marked T3S R36E S23 BT
- A 21 inch diameter Ponderosa Pine bears S41°E, 24.26 feet marked T3S R36E S26 BT
- A 18 inch diameter Ponderosa Pine bears S42°W, 168.40 feet marked T3S R36E S27 BT
- A 17 inch diameter Ponderosa Pine bears N73°W, 179.16 feet marked T3S R36E S22 BT


Raised a mound of stone around monument, 2 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.

Set a steel fencepost approximately 5 feet East with Land Survey Monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on September 30, 1989.

Witnesses: Rick Robinson and Jeff Petersen

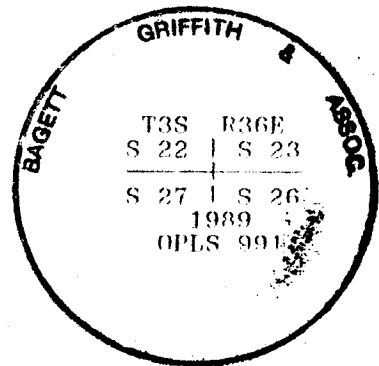

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Gregory T. Blackman*

**OREGON**  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of.....

**UNION COUNTY  
SURVEYOR**

---

(COUNTY OFFICIAL) (DEPUTY)

Date Received 11-14-89

Date Filed 11-14-89

By R. ROBINSON, DEPUTY

File No. 224-89R

Form R6-7100-57 (9/71)

\*GPO-591-971, 1988

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200812

SECTION CORNER COMMON TO SECTIONS 22, 23, 26 and 27

TWP. 3 S. RGE. 36 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: November 4, 2008

LAT: 45 ° 16 ' 53.63787 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 17 ' 0.79101 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 596571.906 INT FT.

E: 8772513.019 INT FT.

TYPE: GPS

THETA: 1 ° 34 ' 18.7434394 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998965165

ELEV: 3383.79 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is a 2 1/2"x30" aluminum pipe set in fence cor with 2 1/2" aluminum cap marked:

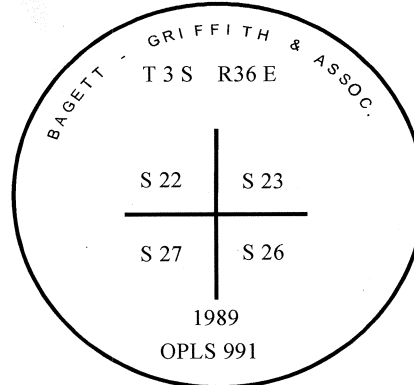

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)