


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

-16

History of original corner establishment:

None set.

Index File No. S-4

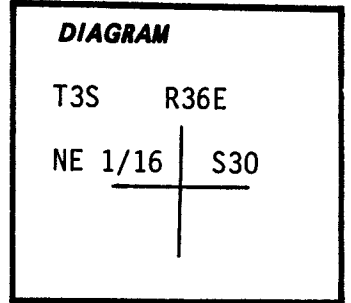


Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner: At surveyed point set 2½"x30" galvanized pipe with brass cap stamped. Set pipe 8" in ground with mound of stone and soil to cap.

From which:

A P. Pine 40" in dia. bears S87°E, 154.0 ft., scribed NE 1/16 S30 BT. A P. Pine 13" in dia. bears S72°W, 182.5 ft., scribed NE 1/16 S30 BT. Attached 54-3 signs to both BTs. Attached brass washer stamped LS 1294 to foot blaze of both BTs. Painted blazes and 6" band around both BTs red. Attached 54-2 and 54-4 signs to metal fence post 5' South of corner. Attached 54-2 and 54-9 signs to metal fence post 5' East of corner.



I hereby certify the above corner monument was established as herein described on November 16, 1979.

Witnesses:

- R. Orton
- G. Wagoner
- M. Wagoner
- D. Allen

REGISTERED PROFESSIONAL LAND SURVEYOR

Howard L. Perry

OREGON
SEPTEMBER 23, 1977
HOWARD L. PERRY
1 2 9 4

Office of..... County Surveyor County of..... Union

State of..... Oregon..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19..79

..... by

(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR

Date Received _____

☆ GPO—788-276

Date Filed _____

By _____

File No. 451-84R