


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by John A. Hurlburt under GLO contract number 201, dated August 5, 1873. Surveyor General record states:

Set pine post 4 ft. long 4 in. square 2 ft. in ground for cor to sec 26-27-34 and 35

Pine 24 in dia N60°W 158 lks  
 Pine 8 in dia S24°W 171 lks  
 Pine 18 in dia S25°E 52 lks  
 Pine 30 in dia N37°E 109 lks

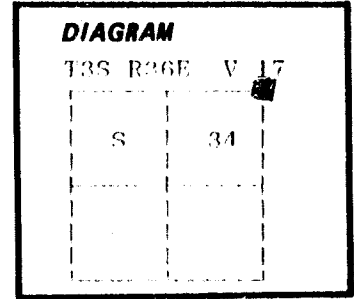

No record of subsequent monumentation found in Union County survey records.

**Description of corner evidence found:**

Found no evidence of the original corner monument or its accessories.

See Union County Survey Number 25-89

**Description of monument and accessories I established to perpetuate the**

**original location of this corner:** At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which;

New Bearing Trees;


A 13 inch diameter Ponderosa Pine bears N29°E, 55.95 feet marked T3S R36E S26 BT  
 A 8 inch diameter Douglas Fir bears S87°E, 24.90 feet marked T3S R36E S35 BT  
 A 11 inch diameter Douglas Fir bears S50°W, 39.05 feet marked T3S R36E S34 BT  
 A 15 inch diameter Douglas Fir bears N73°W, 54.94 feet marked T3S R36E S27 BT

Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.

Set a steel fencepost approximately 5 feet North with Land Survey Monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on September 30, 1989.

Witnesses: Rick Robinson and Jeff Petersen

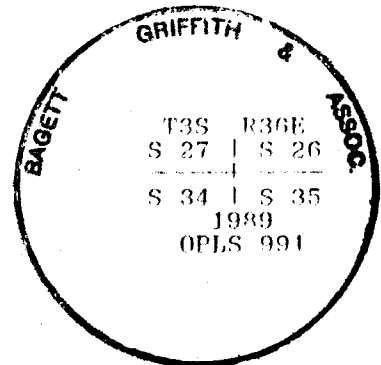

**REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR**

*Gregory T. Blackman*

**OREGON**  
 JULY 13, 1973  
**GREGORY T. BLACKMAN**  
 991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

**UNION COUNTY  
 SURVEYOR**

---

Date Received 11-14-89  
 Date Filed 11-14-89  
 By R. ROBINSON Deputy  
 File No. 228-692

(DEPUTY)

Form R6-7100-57 (9/71)

\*GPO-591-971, 1988

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200811

SECTION CORNER COMMON TO SECTIONS 26, 27, 34 and 35

TWP. 3 S. RGE. 36 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: November 4, 2008

LAT: 45 ° 16 ' 0.39396 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 17 ' 0.77982 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 591181.961 INT FT.

E: 8772661.727 INT FT.

TYPE: GPS

THETA: 1 ° 34 ' 18.7341711 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998960427

ELEV: 3661.04 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is a 2 1/2"x30" aluminum pipe  
with 2 1/2" aluminum cap marked:

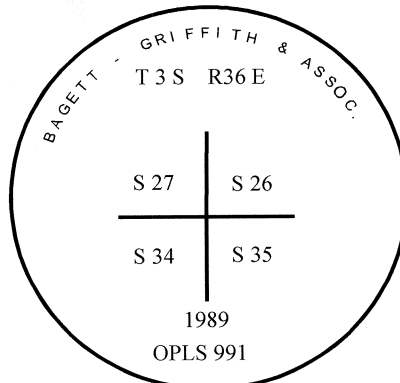

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)