


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by William H. O'Dell under GLO contract Number 120, dated May 27, 1867. Surveyor General record states:

Set post for corner from which;

- A pine 20 ins. dia. bears S 8°E, 63 lks dist.
- A pine 10 ins. dia. bears S45°W, 104 lks dist
- A pine 12 ins. diam. bears N20°W, 39 lks dist.



**DIAGRAM**

No record of subsequent monumentation found in Union County survey records

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

- Found a pine, 20 ins. ±, S8°E, 63 lks. no marks visible.
- Found a stump hole, S45°W, 104 lks.
- Found the topo calls to the Grande Ronde river north and west to fit, after making allowance for highway construction.

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>6-22-93</u>
Date Filed	<u>6-30-93</u>
By	<u>R. ROBINSON, DEPUTY</u>
File No.	<u>016-1993R</u>

See Union County Survey Number 1993-020.


**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the record bearings and distances from SE and SW bts. I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, marked as shown, from which;

**NEW BEARING TREES:**

- A 10' X 7' X 10' high rock outcrop bears N59°E, 70.60 feet, marked X B0 on the north end 3' above the ground.
- A 27 inch diameter Ponderosa Pine bears S17°E, 29.90 feet marked T3S R37E S 7 BT
- A 15 inch diameter Tamarack bears S52°W, 69.90 feet marked T3S R36E S12 BT
- A 26 inch diameter Ponderosa Pine bears N11°W, 61.75 feet marked T3S R36E S1 BT

Raised a mound of stone around monument, 4 ft. base to top of cap.

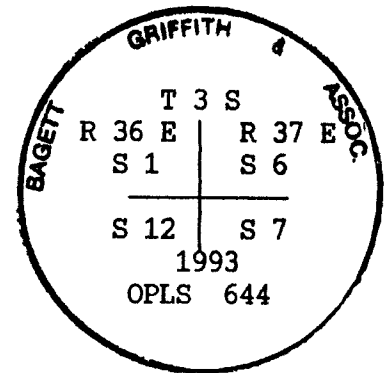

I hereby certify that the above corner point was perpetuated as hereon described on May 9, 1993.

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Duane I. Griffith*  
 OREGON  
 JULY 10, 1984  
**DUANE I. GRIFFITH**  
 644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200614

SECTION CORNER COMMON TO SECTIONS 1, 6, 12 and 7

TWP. 3 S. RGE. 36 E.  
& 37

GEODETIC COORD: NAD 83(91)

DATE TIED: October 26, 2006

LAT: 45 ° 19 ' 34.90879 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 14 ' 30.49487 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 613195.671 INT FT.

E: 8782798.079 INT FT.

TYPE: GPS

THETA: 1 ° 36 ' 5.33136025 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998983579

ELEV: 3097.58 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is a 2 1/2"x30" aluminum pipe with  
2 1/2" aluminum cap marked:



REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*  
OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2006

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)