


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

The corner was originally established by William H. Odell under GLO contract No. 120 dated May 27, 1867. The Surveyor General Record states:

Set 1/4 Sec post cor., deposited marked stone, and raised stone mound as per instructions.



I found no subsequent record of monumentation in the Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:


I found a distinct mound of stones with a decayed wood post in the mound. I could not distinguish any marks on the stones. The mound falls approximately 17' south of an east - west fence line.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position of the decayed wood in the mound I set a 2 1/4" Brass Cap on a 1 3/8" x 30" galvanized iron pipe 26" in the ground with a 24" x 6" mound of stone around it. I stamped the cap as shown below.

I marked four bearing trees. Each bearing tree has a 1 1/2" brass washer fastened between the letters B and T with a 2" PK nail. The washer is stamped WTS and 56295 LS. Measurements were taken to the dent in the head of the nail with a Trimble 5601 electronic total station. Bearings are based on the survey control for County Survey No. 032-2004.

- An 18" Ponderosa Pine bears N11°35'07"W, 134.21', scribed 1/4 S30 BT.
- A 32" Pondersa Pine bears N40°26'05"E, 134.51', scribed 1/4 S30 BT.
- An 18" Pondersa Pine bears S21°40'07"E, 48.07', scribed 1/4 S31 BT.
- A 15" Pondersa Pine bears S14°27'13"W, 51.53', scribed 1/4 S31 BT.

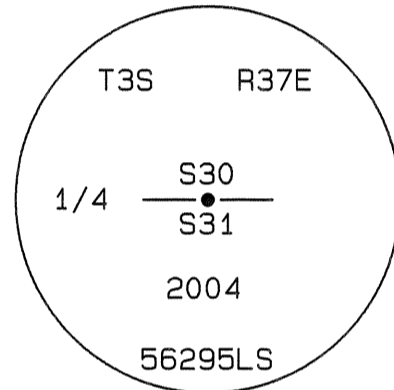

I hereby certify that the above corner point was perpetuated as hereon described on August 31, 2004.

Witness: David Haddock

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Stephen K. Haddock

OREGON
JULY 9, 2001
STEPHEN K. HADDOCK
56295LS

RENEWAL DATE 6-30-05

UNION COUNTY SURVEYOR	
Date Received	<u>12/8/04</u>
Date Filed	<u>12/10/04</u>
By	<u>R. ROBINSON, Deputy</u>
File No.	<u>063-2004R</u>