


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

The corner was originally established by William H. Odell under GLO contract No. 120 dated May 27, 1867. The Surveyor General Record states:

Set 1/4 Sec. post cor. From which
A pine 18 in dia bears N25°E 80 lks.
A pine 20 in dia bears S30°W 40 lks.



I found no subsequent record of monumentation in the Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:


None.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportionate point I set a 2 1/4" Brass Cap on a 1 3/8" x 30" galvanized iron pipe 18" in the ground. I raised a 24" x 12" mound of stone around it. I stamped the cap as shown below.

I marked four bearing trees. Each bearing tree has a 1 1/2" brass washer fastened between the letters B and T with a 2" PK nail. The washer is stamped WTS and 56295 LS. Measurements were taken to the dent in the head of the nail with a Trimble 5601 electronic total station. Bearings are based on the survey control for County Survey No. 032-2004.

- An 18" Ponderosa Pine bears N28°31'40"E, 19.31', scribed 1/4 S32 BT.
- An 18" Douglas Fir bears S64°26'28"E, 16.39', scribed 1/4 S32 BT.
- A 17" Ponderosa Pine bears S47°29'11"W, 132.94', scribed 1/4 S31 BT.
- A 15" Ponderosa Pine bears S88°36'21"W, 60.48', scribed 1/4 S31 BT.

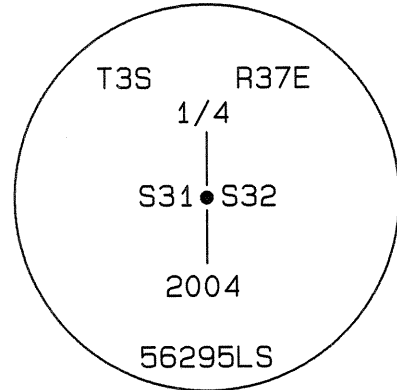

I hereby certify that the above corner point was reestablished as hereon described on September 2, 2004.

Witness: David Haddock

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Stephen K. Haddock

OREGON
JULY 9, 2001
STEPHEN K. HADDOCK
56295LS

RENEWAL DATE 6-30-05

UNION COUNTY
SURVEYOR

Date Received 12/8/04

Date Filed 12/10/04

By R. Robinson, Deputy

File No. 064-2004R