

LINE DATE PARTY

PROJECT

SE Cor of NE 1/4 NE 1/4 sec 4
FC Co. 53' West and 90° North.
1/4 mile west FC. 84' North.

Found bearing Tree and Rock Cor.
1/4 Sec. Cor. of sec. 4 - 45 N 37
Distance 37' Short.

Aug 10.

Start at SW Cor. of SE 1/4 SE 1/4 31
North 1320' Var. 20° set Cor. 2" x 2" Post.
Marked Tree ^{10" Pin 4.3' NW} NW Cor. of SE 1/4 SE 1/4 of Sec. 31
T 35 R 37 E NW 1/4 Tree born N 26° W 4.7
Thence West Var. 20° E 2640' set 2" x 2" Post
the SW Cor. of the NE 1/4 - SW 1/4 of Sec 32 T 35 R 37
5" Tree Pine born N 50° W 10.5 ft.

Thence North Var. 70° E 1320' set 2" x 2" Post
Marked 6" Tree NW Cor. of the NE 1/4 of SW 1/4
of 32 T 35 R 37 E NW 1/4 Tree born.
West 93'

Thence East Var. 20° ⁷⁸⁸ 200' 2) 8' Pin Obsd. 500'
set stake 1249' FC N 5 S

set Center. sec 32 2" x 2" pine stake.
6" Tree Marked Cor. sec 32 T 35 R 37
Tree born N 30° W 6' 0


Thence South 2565' ^{stake} 2" x 2"
2565 to center of E & W line
138.5 ft. East to Cor set from
E and W line

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

A monument reporting to be this corner was set by improper methods in 1941 by Morgan. His record reads:

Set 2" x 2" pine post. Marked 6" tree. Tree bears West 9.3'.

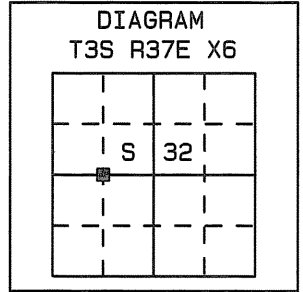

I found no subsequent record of monumentation in the Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:


None:

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED:

At the proper position computed per the 1973 Manual of instructions I set a 1" x 24" iron rebar with a 2" aluminum cap flush with the surface of the ground. The cap was stamped as shown below.

I marked two bearing trees. Each bearing tree has a copper nail with a 1 1/8" head stamped WTS and 56295LS driven between the letters B & T. Measurements were taken to the dent in the head of the nail with a Trimble 5601 electronic total station. Bearings are based on the survey control for County Survey No. 032-2004.

An 11" Ponderosa Pine bears N45°16'06"E, 26.73', scribed CW 1/16 S32 BT.
A 13" Ponderosa Pine bears S51°16'16"E, 17.80', scribed CW 1/16 S32 BT.

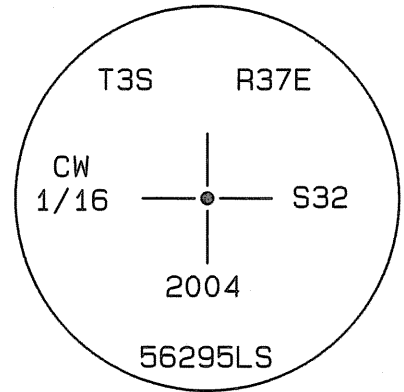

I hereby certify that the above corner point was established as hereon described on September 2, 2004.

Witness: Kyle Lathrop
David Haddock

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Stephen K. Haddock

OREGON
JULY 9, 2001
STEPHEN K. HADDOCK
56295LS

RENEWAL DATE 6-30-05

UNION COUNTY
SURVEYOR

Date Received 12/8/04

Date Filed 12/10/04

By R. ROBINSON DEPUTY

File No. 065-2004 R