

LINE DATE

PARTY

PROJECT

SE Cor of NE 1/4 NE 1/4 Sec 4
 FC Co. 53' West and 90' North.
 1/4 mile West FC. 84' North.

Found bearing Tree and Rock Cor.
 1/4 Sec. Cor. of sec. 4 - 45 T37
 Distance 37' Short.

Aug 10.

Start at SW Cor. of SE 1/4 SE 1/4 31'
 North 1320' Var. 20° set Cor. 2" x 2" Post.
 Marked Tree ^{10" Pin 4.3' NW} NW Cor. of SE 1/4 SE 1/4 Sec. 31
 T35 & 37 EWN Tree bears N26° W 4.7
 Thence West Var 20° E 2640' set 2" x 2" Post.
 the SW Cor. of the NE 1/4 - SW 1/4 of Sec 32 T35R37
 5" Tree Pine bears N50° W 10.5 ft.

Thence North Var. 70° E 1320' set 2" x 2" Pin Post
 Marked 6" Tree NW Cor. of the NE 1/4 of SW 1/4
 of 32 T35R37 EWN Tree bears.
 West 93'
 Thence East Var. 20° ^{788'} 200' 2) 8' Pin Obs'd. 800'
 set stake 1249' FC N & S

set. Center. sec 32 2" x 2" pine stake.
 6" Tree Marked Center sec. 32 T35R37
 Tree bears N30° W 6' 0


thence South 2565' ^{stake} 2" x 2"
 2565 to intersection of E & W line
 138.5 ft. East to Cor set from
 E and W line

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

A monument reporting to be this corner was set by improper methods in 1941 by Morgan. His record reads:

Set center Sec 32 2" x 2" pine stake. 6" tree marked. Tree bears N30°W 6.0'.



I found no subsequent record of monumentation in the Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:


None:

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proper position computed per the 1973 Manual of instructions I set a 1" x 24" iron rebar with a 2" aluminum cap flush with the surface of the ground. The cap was stamped as shown below.

I marked four bearing trees. Each bearing tree has a 1 1/2" brass washer fastened between the letters B and T with a 2" PK nail. The washer is stamped WTS and 56295 LS. Measurements were taken to the dent in the head of the nail with a Trimble 5601 electronic total station. Bearings are based on the survey control for County Survey No. 032-2004.

- A 10" Ponderosa Pine bears N09°34'26"W, 83.94', scribed C1/4 S32 BT.
- An 18" Ponderosa Pine bears S42°36'43"E, 18.52', scribed C1/4 S32 BT.
- An 11" Ponderosa Pine bears S04°32'53"W, 34.39', scribed C1/4 S32 BT.
- A 13" Ponderosa Pine bears S68°01'04"W, 37.88', scribed C1/4 S32 BT.

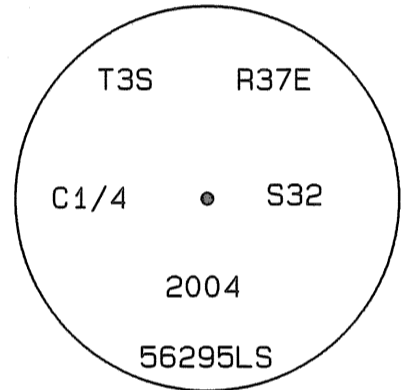

I hereby certify that the above corner point was established as hereon described on August 28, 2004.

Witness: David Haddock
Kyle Lathrop
Ted Atkinson

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Stephen K. Haddock

OREGON
JULY 9, 2001
STEPHEN K. HADDOCK
56295LS

RENEWAL DATE 6-30-05

UNION COUNTY
SURVEYOR

Date Received 12/8/04

Date Filed 12/10/04

By R. ROBINSON, DEPUTY

File No. 066-2004R