


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:  
None.




DESCRIPTION OF CORNER EVIDENCE FOUND:  
None.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proper position computed per the 1973 Manual of instructions I set a 1" x 24" iron rebar with a 2" aluminum cap flush with the surface of the ground. The cap was stamped as shown below.

I marked two bearing trees. Each bearing tree has a copper nail with a 1 1/8" head stamped WTS and 56295LS driven between the letters B & T. Measurements were taken to the dent in the head of the nail with a Trimble 5601 electronic total station. Bearings are based on the survey control for County Survey No. 032-2004.

An 18" Ponderosa Pine bears S77°20'45"W, 138.22', scribed S1/16 S31 BT.  
A 23" Ponderosa Pine bears S48°42'07"E, 81.33', scribed S1/16 S32 BT.

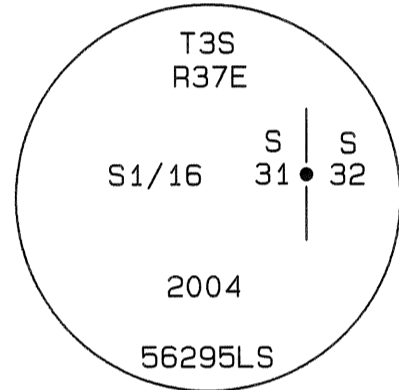

I hereby certify that the above corner point was established as hereon described on August 28, 2004.

Witness: Kyle Lathrop  
David Haddock

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Stephen K. Haddock*

OREGON  
JULY 9, 2001  
STEPHEN K. HADDOCK  
56295LS

RENEWAL DATE 6-30-05

UNION COUNTY  
SURVEYOR

---

Date Received 12/8/04

Date Filed 12/10/04

By R. ROBINSON, DEPUTY

File No. 069-2004R