

LINE DATE PARTY

PROJECT

SE Cor of NE 1/4 NE 1/4 sec 4
FC Co. 53' West and 90° North.
1/4 mile west FC. 84' North.

Found bearing Tree and Rock Cor.
1/4 Sec. Cor. of sec. 4 - 45 N 37
Distance 27' short.

Aug 10.

Start at SW Cor. of SE 1/4 SE 1/4 32'
North 1320' Var. 20° set cor. 2" x 2" post.
Marked Tree ^{10' from 4.3' NW} NW Cor. of SE 1/4 SE 1/4 of Sec. 31
T 35 R 37 E W 1/4. Tree bears N 26° W 4.7

Thence West Var 20° E 2640' set 2" x 2" post.
the SW Cor. of the NE 1/4 - SW 1/4 of Sec 32 T 35 R 37
5" Tree pine bears N 50° W 10.5 ft.

Thence North Var. 20° E 1320' set 2" x 2" post.
Marked 6" Tree NW Cor. of the NE 1/4 of SW 1/4
of 32 T 35 R 37 E W 1/4 Tree bears.
West 93'
Thence East Var. 20° ^{798'} 200' 2) 8' line Obsd. 500'
set stake 1249' FC N 1/4 S


set. Center. sec 32 2" x 2" pine stake.
6" Tree marked Cor. Sec 32 T 35 R 37.
Tree bears N 30° W 6' 0
Thence South 2565' ^{stake} 2" x 2"
2565 to intersection of E & W line
138.5 ft. East to Cor set from
E and W line

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

A monument reporting to be this corner was set by improper methods in 1941 by Morgan. His record reads:

Set 2" x 2" post. 5" Tree pine bears N50°W 10.5'.



I found no subsequent record of monumentation in the Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:


None.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proper position computed per the 1973 Manual of instructions I set 3" domed brass cap cemented in a drill hole in the bedrock 3" below the surface. The cap was stamped as shown below.

I marked two bearing trees. Each bearing tree has a copper nail with a 1 1/8" head stamped WTS and 56295LS driven between the letters B & T. Measurements were taken to the dent in the head of the nail with a Trimble 5601 electronic total station. Bearings are based on the survey control for County Survey No. 032-2004.

An 13" Ponderosa Pine bears S35°47'20"W, 52.34', scribed SW 1/16 S32 BT.
An 12" Ponderosa Pine bears S57°18'57"E, 34.52', scribed SW 1/16 S32 BT.

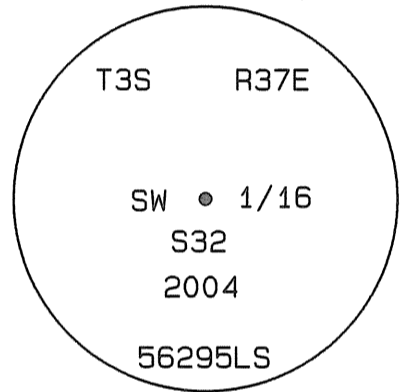

I hereby certify that the above corner point was established as hereon described on September 2, 2004.

Witness: David Haddock
Kyle Lathrop

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Stephen K. Haddock

OREGON
JULY 9, 2001
STEPHEN K. HADDOCK
56295LS

RENEWAL DATE 6-30-05

UNION COUNTY
SURVEYOR

Date Received 12/8/04

Date Filed 12/10/04

By R. Robinson, Deputy

File No. 070-2004R