


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William H. Odell under GLO contract number 120, dated May 27, 1867. Surveyor General record states:

- Set post for section corner from which,
- A Pine 20 in. dia. Pine bears N40°E 10 lks
- A Pine 20 in. dia. Pine bears S20°E 37 lks
- A Pine 36 in. dia. Pine bears S40°W 80 lks
- A Pine 18 in. dia. Fir bears N10°W 36 lks

In 1882 the line was retraced by Herman D. Gradon under GLO contract number 452, dated June 16, 1882.



Surveyor General record states:

The old sec cor. - a post with 4 pine bearing trees. I obliterate the marks on post referring to secs S of the line, and also obliterate the marks on bearing trees S of line.

No record of subsequent monumentation found in Union County survey records.
Description of corner evidence found:

- Found a 19 in. dia. Ponderosa Pine stump N40°E, 10 lks, BT blaze evident, scribes visible.
- Found a 10 in. dia. Ponderosa Pine stump S20°E, 37 lks, no marks.
- Found a 30+ in. dia. Ponderosa Pine stump S40°W, 58.9 ft. with BT blaze chopped out.
- Found a 22 in. dia. Fir stump N25°W, 36 lks., scribes visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from the found NE, SE, and NW bearing trees, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which;


New Bearing Trees:

- A 14 inch diameter Ponderosa Pine bears N43°E, 51.87 feet marked T3S R37E S32 BT
- A 14 inch diameter Ponderosa Pine bears S30°W, 64.14 feet marked X BT
- A 14 inch diameter Douglas Fir bears S67°W, 34.05 feet marked XX BT
- A 17 inch diameter Ponderosa Pine bears N9°W, 77.32 feet marked T3S R37E S31 BT

Set steel fence post 5± feet North with FFS K-tag.

I hereby certify that the above corner point was perpetuated as hereon described on November 6, 1992.

Witness: Jeff Peterson
 Greg Blackman

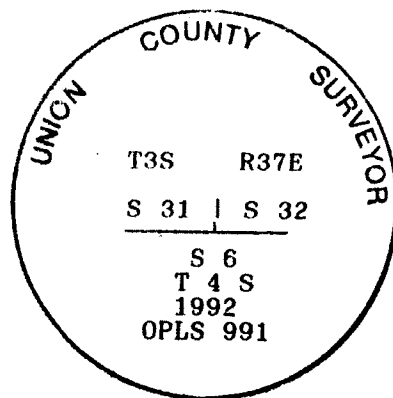

I used a steel tape and magnetic compass in the establishment of new accessories. I used 15° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

UNION COUNTY SURVEYOR	
Date Received	11/23/92
Date Filed	11/27/92
By	R. ROBINSON, Deputy
File No.	088-1992R.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200915

SOUTH SECTION CORNER COMMON TO SECTION 31 AND 32

TWP. 3 S RGE. 37 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: APRIL 23, 2009

LAT: 45 ° 15 ' 7.43953 " N

SURVEYOR: RICK ROBINSON
OPLS 2219

LONG: 118 ° 13 ' 16.62330 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 586266.915 INT FT.

E: 8788837.313 INT FT.

TYPE: GPS

THETA: 1 ° 36' 57.7 "

ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9998956373

ELEV: 3951.03 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is a 2 ½" aluminum monument marked
as shown, set flush with the ground

T3S R37E

S31 | S32

S6
T4S
1992

OPLS 991

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

Renewal Date: December 31, 2010