

**UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:


Corner originally established by David P. Thompson, under GLO contract Number 103, dated September 3, 1863. Surveyor General record states: Set post in mound of earth.

1922 monumentation of La Grande (filed as survey 18-89) calls setting monument at corner position.

No record of subsequent monumentation found in Union County survey records

Description of corner evidence found:

None

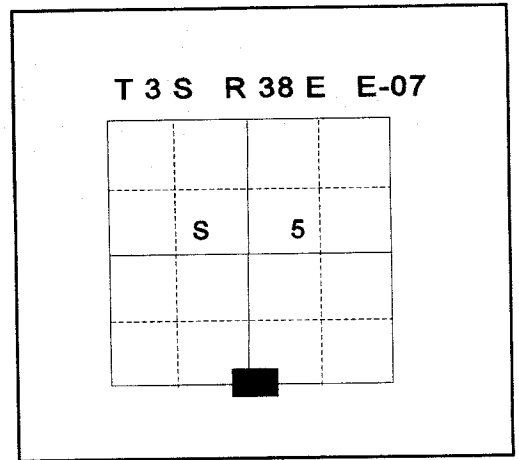

See Union County Survey 015-1996

Description of monument and accessories I established to perpetuate the original location of this corner:


At the position determined on survey 015-1996, I set a 2½" x 30" aluminum pipe monument with a 2½" aluminum cap marked as shown, 27 inches in the ground, from which;

NEW BEARING OBJECTS:


- A 5/8" x 30" iron pin with 1½" aluminum cap bears N55°E, 6.70 feet, marked UNION COUNTY SURVEYOR NE RP.
- A 5/8" x 30" iron pin with 1½" aluminum cap bears S35°E, 5.67 feet, marked UNION COUNTY SURVEYOR SE RP.
- A 5/8" x 30" iron pin with 1½" aluminum cap bears S50°W, 6.05 feet, marked UNION COUNTY SURVEYOR SW RP.
- A 5/8" x 30" iron pin with 1½" aluminum cap bears N39°W, 6.44 feet, marked UNION COUNTY SURVEYOR NW RP.

I hereby certify that the corner was monumented on March 25, 1996.

Witness: Mark Durbin, Jeff Madsen

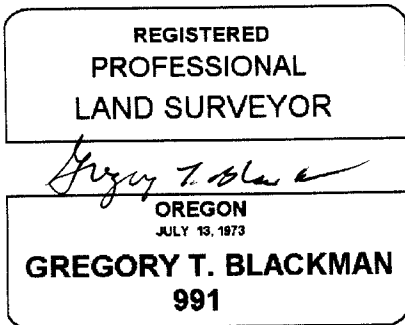

Renewal Date: December, 31 1997

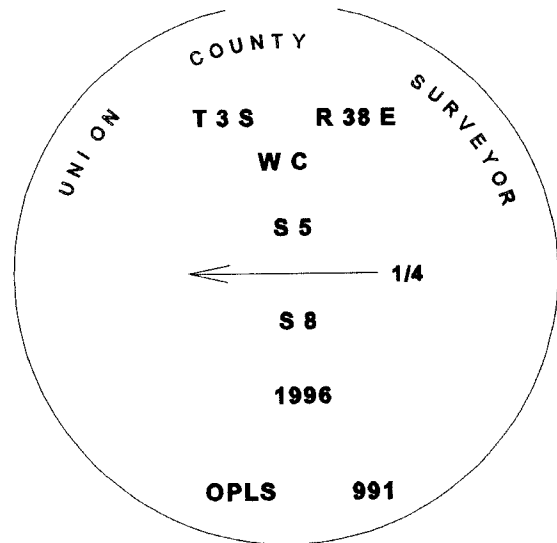

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination.

UNION COUNTY SURVEYOR
Date Received <u>3-28-96</u>
Date Filed <u>3-28-96</u>
By <u>R. ROBINSON, Deputy</u>
File No. <u>037-1996 R</u>

E-07

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9625

WITNESS COR TO QUARTER COR
SEC.5 \ 8 TWP.3S, RGE.38E, W.M.
DATE FD.: MARCH, 1996
SURVEYOR: WALTER L. CASWELL
PLS 737


FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)
LAT: 45°19'33.12729" N
LONG: 118°05'09.63027" W
SP. COOR: NAD 83(91)
N: 614173.757 INT.FT.
E: 8822855.027 INT.FT.
THETA: 1°42'43.088"
SCALE FACTOR: 0.999898334
ELEV: 2770.513 US.FT.
ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

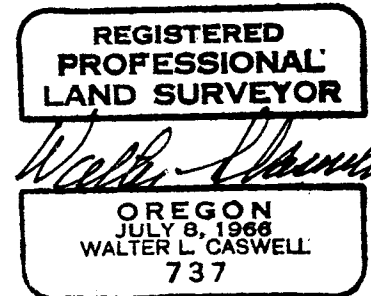

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007
SHEET 40 OF 66