

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Survey No. 24-75 position only  
Survey No. 110-78 position only  
Survey No. 42-84 position only  
Survey No. 041-1992 position as per Survey No. 42-84  
Survey No. 022-1993 position only

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At position established by Survey 42-84 I set a 2 1/2" brass disc in concrete, marked as shown below from which;

NEW BEARING OBJECTS:


A brass screw in a lead plug in curb return bears N41°23'00"E, 22.69 feet,  
A brass screw in a lead plug in curb return bears S41°15'22"E, 32.70 feet,  
A brass screw in a lead plug in curb return bears S41°23'00"°W, 32.02 feet,  
A brass screw in a lead plug in curb return bears N41°15'22"°W, 22.94 feet,

I hereby certify that the corner was monumented on 20 December 2001.

Witnesses: Norbert W. Volny, Gregory T. Blackman Jr.

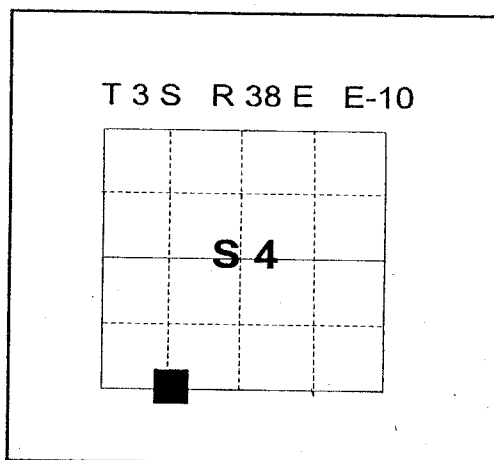

**UNION COUNTY SURVEYOR**  
Date Received 1/02/02  
Date Filed 2/25/02  
Filed By R. ROBINSON DEWITT  
File Number 001-2002 R

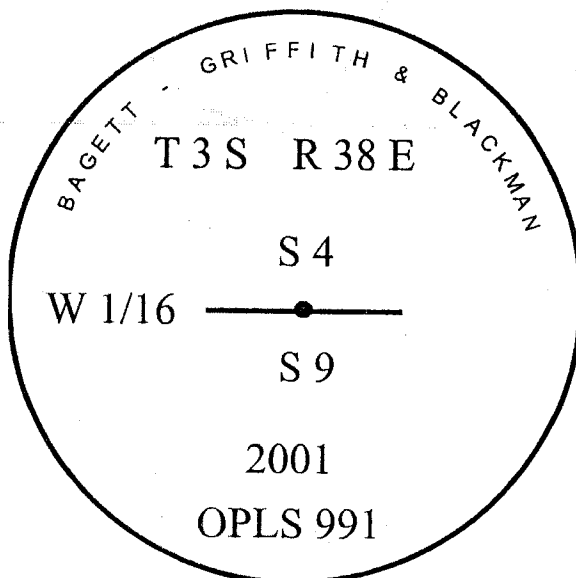

REGISTERED PROFESSIONAL LAND SURVEYOR

*Gregory T. Blackman*  
OREGON JULY 19, 1973  
**GREGORY T. BLACKMAN**  
991

Renewal Date: December 31, 2003

I used a Leica TCA 1100 total station and prism in the establishment of the new accessories. The basis of bearing is the same as Survey No. 2002-001. Distances are to the center of the brass screw.