

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by David T. Thompson under GLO contract number 103, dated September 2, 1863.

Surveyor General record states:

Set post for corner to sections 2, 3, 10 and 11, in mound of earth with charcoal stake, pits, trench as per instructions.

The corner has been perpetuated with a stone 15"x7"x6" with a cross on the top. Stone has been called as the monument by the county surveyor on his plats. Survey number 9-72 refers to "Stone corner" Survey number 19-67 refers to "stone"

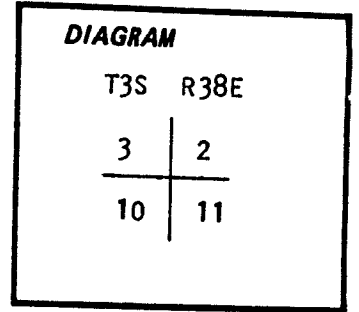

See surveys 19-67, 9-72, 74-70, 41-71, 94-77

Description of corner evidence found:

Found 15x7x6 stone with cross on the top of the stone, firmly set in old fence line. Stone was buried 13" in the ground. Bound bits of charcoal in monument hole.


Description of monument and accessories I established to perpetuate the original location of this corner:

At the stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28" in the ground, and buried the stone to the west. No suitable trees available for BTs.

Nailed K tag to fence post for an aid to location.

Date Set : July 5, 1985

Witness: Rick Robinson

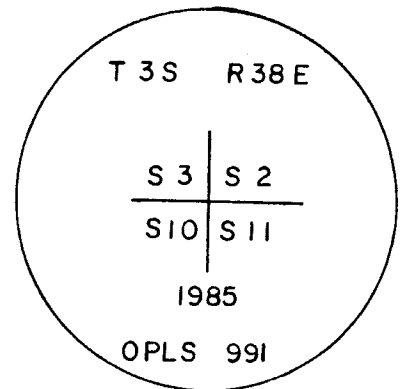

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR

Date Received 7-23-85

Date Filed 8-7-85

By G. LANGLITZ, DEPUTY

File No. 48-85 R

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9627

CORNER COMMON TO: 2,3,10 & 11

TWP.3S, RGE.38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°19'32.98312" N

LONG: 118°02'06.14690" W

SP. COOR: NAD 83(91)

N: 614554.904 INT.FT.

E: 8835957.710 INT.FT.

THETA: 1°44'53.212"

SCALE FACTOR: 0.999898332

ELEV: 2718.000 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
JULY 8, 1966
WALTER L. CASWELL
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007

SHEET 42 OF 66