


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner not previously established.

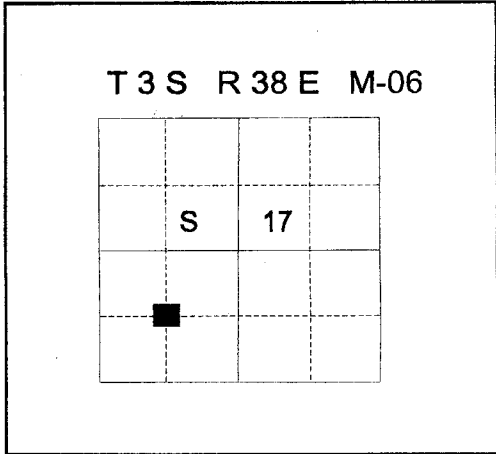

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner not previously established.

See Survey Number 024-2000.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 5/8"x30" iron pin with a 2" aluminum cap marked as shown below, 30" in the ground, from which:

NEW BEARING OBJECTS:

A 5/8"x30" iron pin set by survey number 6-73, bears South 82°09' West, a distance of 13.26 ft.

A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "NW RP" bears N 29°23'W, a distance of 30.12 ft. (Pin is set in an existing North-South fence line.

I hereby certify that the corner was monumented on August 15, 2000.
Witnesses: Norbert Volny and Greg Blackman Jr.


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986

RICK G. ROBINSON
2219

Renewal Date December 31, 2000

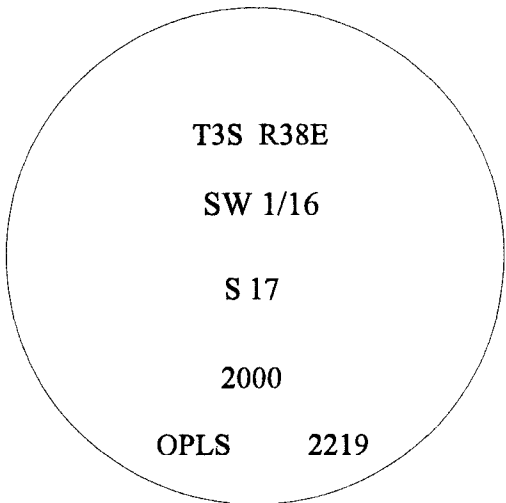

**UNION COUNTY
SURVEYOR**

Date Received 8/18/00

Date Filed 8/26/00

Filed By *Gregory T. Clark*

File Number 012-2000R

I used a total station instrument in the establishment of new accessories. The basis of bearing is the same as that of Survey Number 024-2000. The distances are to the center of the aluminum cap.