


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Refer to Union County Survey No. 53-80 for establishment of corner by survey.

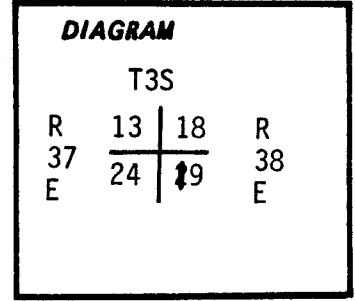


Description of corner evidence found:

Found a 1½" galvanized Iron Pipe, firmly set with brass cap and Bearing Trees. Refer to Union County Survey No. 53-80.

Description of monument and accessories I established to perpetuate the original location of this corner:

None.

Gary Langlitz, LS 1099  
Greg Orton

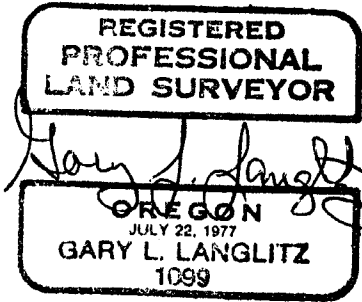

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>11-18-85</u>
Date Filed	<u>11-18-85</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>99-85R</u>

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

# HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9638

CORNER COMMON TO: 13,18,19 & 24

TWP.3S, RGE.37 & 38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL  
PLS 737

FIRM: EAGLE GPS SURVEY CORP  
6110 S.W. LOMBARD AVE.  
BEAVERTON, OR. 97008  
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°17'47.74472" N

LONG: 118°06'59.76108" W

SP. COOR: NAD 83(91)

N: 603272.270 INT.FT.

E: 8815305.456 INT.FT.

THETA: 1°41'24.985"

SCALE FACTOR: 0.999897066

ELEV: 3829.399 US.FT.

ELEV. DATUM: NGVD 29

\*\*\*\*\*  
DIRECTIONS "TO REACH"

*AMENDED*

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Walter L. Caswell*

OREGON  
JULY 8, 1966  
WALTER L. CASWELL  
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly  
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly  
To Calculate Elevation Factor (in the North American Continent)  
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007  
SHEET 58 OF 66

**HORIZONTAL CONTROL DATA**  
**UNION COUNTY, OREGON**  
**OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 9638

CORNER COMMON TO: 18, 19, 13, & 24

TWP. 3 S. RGE. 37&38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: MARCH 1996

LAT: 45 ° 17 ' 47.67587 " N

SURVEYOR: WALTER L. CASWELL  
PLS 737

LONG: 118 ° 6 ' 59.80511 " W

FIRM: EAGLE GPS SURVEY CORP  
6110 SW LOMBARD AVE.  
BEAVERTON, OR. 97008-4736  
(503) 643-1073

SP. COOR: NAD 83(91)

N: 603265.207 INT FT.

E: 8815302.516 INT FT.

TYPE: GPS

THETA: 1 ° 41 ' 24.9542369 "

ORDER: SECOND CLASS: 2


SCALE FACTOR: 0.9998970655

ELEV: 3829.40 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

This sheet has been edited. The original coordinates came from an eccentric station and the convergence angle was applied the wrong way.

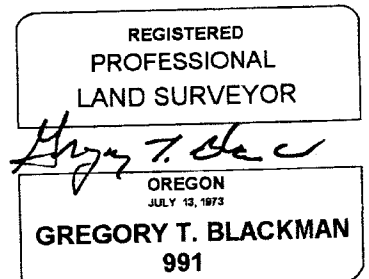

Renewal Date: Dec. 31, 2001

1 METER = 3.2808333333... US FEET = 39.37 INCHES  
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM  
TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT )  
DIVIDE 20,906,000 BY ( 20,906,000 + ELLIPSOID ELEV. IN FEET )