


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract number 103, dated September 3, 1863 Surveyor General record states:

Set post for 1/4 cor from which;

An Alder 5 ins dia bears N80°E, 39 lks.
A Pine 24 ins dia bears S56°E, 295 lks.



DIAGRAM

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE, area is now under cultivation.

There is a spring in the immediate area, I am unable to determine the original location.
There is an East-West fence line 15 feet South.

See Map of Survey No. 022-1993.

| | |
|------------------------------|----------------------------|
| UNION COUNTY SURVEYOR | |
| Date Received | <u>6-30-93</u> |
| Date Filed | <u>6-30-93</u> |
| By | <u>R. ROBINSON, DEPUTY</u> |
| File No. | <u>023-1993 R</u> |

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position as determined by survey I set a 2 1/2" x 36" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

A 5/8" x 30" rebar bears N 42°E, 6.39 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR NE RP

A 5/8" x 30" rebar bears S 41°E, 6.85 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR SE RP

A 5/8" x 30" rebar bears S 50°W, 6.74 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR SW RP

A 5/8" x 30" rebar bears N 41°W, 9.18 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR NW RP

Set steel fence post 5'± South with Land Corner Monument sign.

Raised a mound of stone 3 foot base to top of cap.


I hereby certify that the above corner point was perpetuated as hereon described on June 22, 1993.

Witnesses:

Jim Bennett
Pete Crabtree

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I GRIFFITH
644

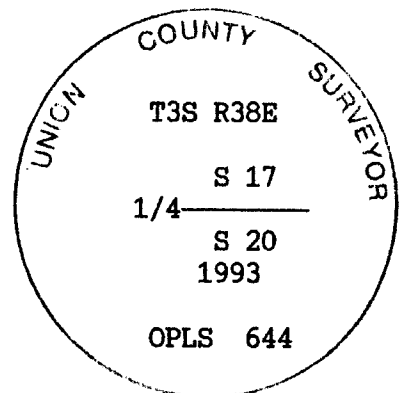

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 60d spike driven in the right side at the root crown.

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9639

QUARTER CORNER TO: 17 / 20

TWP.3S, RGE.38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

*THIS CORNER
HAS BEEN MOVED
SEE SURVEY NO. 020-2000
+ MON RECORDED
010-2000 R*

GEODETIC COOR: NAD 83(91)

LAT: 45°17'48.41990" N

LONG: 118°05'11.23270" W

SP. COOR: NAD 83(91)

N: 603570.879 INT.FT.

E: 8823057.341 INT.FT.

THETA: 1°42'41.952"

SCALE FACTOR: 0.999897074

ELEV: 3166.851 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Walter Caswell

OREGON
JULY 8, 1968
WALTER L. CASWELL
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007
SHEET 60 OF 66

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract number 103, dated September 3, 1863.

Surveyor General Record states:

Set post for 1/4 cor from which:

An Alder 5 ins dia bears N80°E, 391ks.

A Pine 24 ins dia bears S56°E, 295lks.

Corner proportioned and set by Survey No. 022-1993

At position as determined by survey I set a 2½" x 36" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

A 5/8" x 30" rebar bears N 42°E, 6.39 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR NE RP"

A 5/8" x 30" rebar bears S 41°E, 6.85 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR SE RP"

A 5/8" x 30" rebar bears S 50°W, 6.74 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR SW RP"

A 5/8" x 30" rebar bears N 41°W, 9.18 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR NW RP"

Set steel fence post 5'± South with Land Corner Monument sign.

Raised a mound of stone 3 foot base to top of cap.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found monument and all accessories set by Survey No. 022-1993 away from true position as shown on Survey No. 020-2000

See Survey No. 020-2000

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by Survey No. 020-2000 I set a 2½" x 30" aluminum pipe with brass cap marked as shown, 30 inches in the ground, from which:

A 5/8" x 30" rebar bears N 36°E, 8.00 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR NE RP"

A 5/8" x 30" rebar bears S 21°E, 11.95 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR SE RP"

A 5/8" x 30" rebar bears S 26°W, 11.94 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR SW RP"

A 5/8" x 30" rebar bears N 49°W, 7.39 feet, with 2" aluminum cap marked "UNION COUNTY SURVEYOR NW RP"

Set steel fence post 11'± South with Land Corner Monument sign.

There is an East-West fence line 22 feet South.

Raised a mound of stone 3 foot base to top of cap.

I hereby certify that the above corner point was perpetuated as hereon described on April 5, 2000.

Witnesses:

Norbert W. Volny, Gregory T. Blackman II

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: Dec. 31, 2001

UNION COUNTY SURVEYOR



Date Received 8/9/00

Date Filed 8/10/00

Filed By R. Robinson, Deputy

File Number 010-2000R

T 3 S R 38 E N - 07

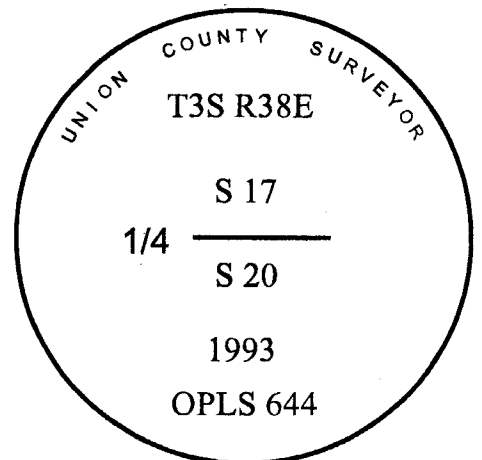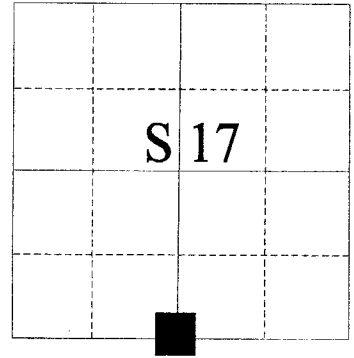

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to the center of aluminum cap.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200910

QUARTER SECTION CORNER COMMON TO SECTIONS 17 AND 20

TWP. 3 S RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: March 12, 2009

LAT: 45 ° 17 ' 48.50324 " N

SURVEYOR: RICK ROBINSON
OPLS 2219

LONG: 118 ° 5 ' 11.23408 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 603579.313 INT FT.

E: 8823056.991 INT FT.

TYPE: GPS

THETA: 1 ° 42 ' 42.0 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.999897074

ELEV: 3166.81 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Located in a pasture about 15 feet North of an East/West running fenceline. Aluminum cap is flush with the ground in a rock mound.



Renewal Date: December 31, 2010

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)