

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


N-13

History of original corner establishment:

Corner originally established in 1863 under GLO contract number 103, dated September 3, 1863

Surveyor general record states:

Set post and mound of earth for corner to sections 15,16,21 & 22

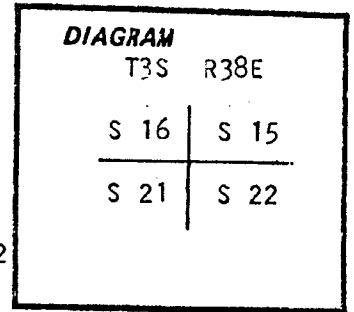

Description of corner evidence found:

In 1971, I retraced Oregon State Highway Department ties to this corner and determined the location, which fell 8.5 feet West of a fence corner. At that time I accepted the fence corner as the best evidence of the corner position.


Description of monument and accessories I established to perpetuate the original location of this corner:

At corner position, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 25 inches in the ground.

A 6 inch x 8 inch fence corner post bears North 1 foot with fences running North, South and West

Corner set September 1, 1983

Witness: Greg Blackman

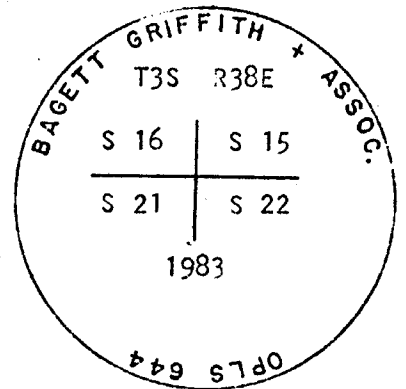

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 644 by the BT blaze of new BTs.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>9-6-83</u>
Date Filed <u>9-12-83</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>329-83 R</u>

REFER TO: SURVEY 31-83

**HORIZONTAL CONTROL DATA**

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9641

CORNER COMMON TO: 15, 16, 21 & 22

TWP. 3S, RGE. 38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL  
PLS 737

FIRM: EAGLE GPS SURVEY CORP  
6110 S.W. LOMBARD AVE.  
BEAVERTON, OR. 97008  
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°17'47.95933" N

LONG: 118°03'18.79477" W

SP. COOR: NAD 83(91)

N: 603765.864 INT.FT.

E: 8831091.884 INT.FT.

THETA: 1°44'01.691"

SCALE FACTOR: 0.999897069

ELEV: 2725.329 US.FT.

ELEV. DATUM: NGVD 29

\*\*\*\*\*  
DIRECTIONS "TO REACH"

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR



OREGON  
JULY 8, 1966  
WALTER L. CASWELL  
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly  
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly  
To Calculate Elevation Factor (in the North American Continent)  
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007  
SHEET 64 OF 66