


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by David T. Thompson under GLO contract Number 103, dated September 3, 1863. Surveyor General record states:

Set post for cor to secs 14, 15, 22 & 23 in mound of earth with charred stake, pits, and trenches as per instructions.

Survey 8-71, 15-71, 37-71, 63-71, 89-71, 7-72, 1-74, 43-77, 13-78, 21-78, and 28-80 all call found monument of record or found RR spike at corner position.

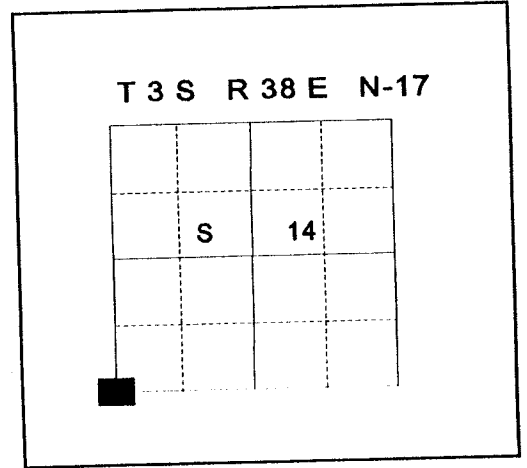

No record of subsequent monumentation found in Union County survey records  
**Description of corner evidence found:**  
 Found 1" x 18" iron spike referred to as RR spike in above mentioned surveys.

**Description of monument and accessories I established to perpetuate the original location of this corner:**  
 In place of found 1" spike, I set a 2½" brass cap marked as shown below on 5/8" x 30" copper rod in monument box, from which;

**NEW BEARING OBJECTS:**

A 5/8" x 30" iron pin with 1½" aluminum cap bears N33°E, 28.74 feet marked UNION COUNTY SURVEYOR NE RP.

A PK in power pole bears S63°E, 45.92 feet.

A 5/8" x 30" iron pin with 1½" aluminum cap bears S14°W, 50.16 feet marked UNION COUNTY SURVEYOR SW RP.

A 5/8" x 30" iron pin with 1½" aluminum cap bears N40°W, 30.19 feet marked UNION COUNTY SURVEYOR NW RP.


I hereby certify that the corner was monumented on March 25, 1996.  
 Witness: Mark Durbin, Jeff Madsen

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 15, 1973  
GREGORY T. BLACKMAN  
991

*Renewal Date: December, 31 1997*

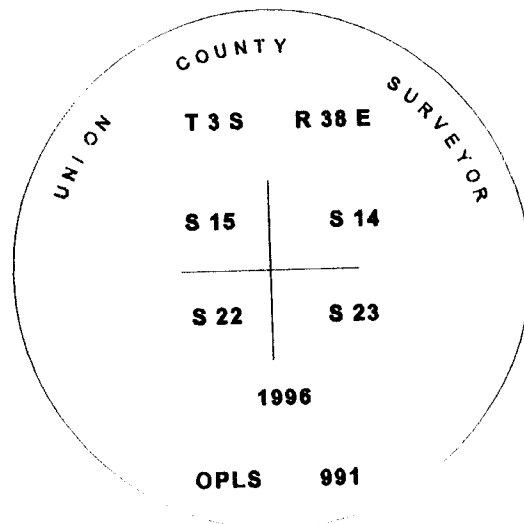

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination.

**UNION COUNTY  
SURVEYOR**

---

Date Received 4-22-96

Date Filed 4-22-96

Filed By J. Peterson, Deputy

File Number 043-1996R

# HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9642

CORNER COMMON TO: 14,15,22 & 23

TWP.3S, RGE.38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL  
PLS 737

FIRM: EAGLE GPS SURVEY CORP  
6110 S.W. LOMBARD AVE.  
BEAVERTON, OR. 97008  
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°17'47.71920" N

LONG: 118°02'05.56476" W

SP. COOR: NAD 83(91)

N: 603900.584 INT.FT.

E: 8836324.507 INT.FT.

THETA: 1°44'53.625"

SCALE FACTOR: 0.999897066

ELEV: 2715.759 US.FT.

ELEV. DATUM: NGVD 29

\*\*\*\*\*  
DIRECTIONS "TO REACH"

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Walter L. Caswell*

OREGON  
JULY 8, 1966  
WALTER L. CASWELL  
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly  
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly  
To Calculate Elevation Factor (in the North American Continent)  
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007  
SHEET 65 OF 66