

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


V-9

History of original corner establishment:

Original Subdivision Survey of T3S R38E was performed by David Thompson under Contract No. 103, dated 1863:

Set post for Corner to Sections 32, 33, 28 and 29, from which:

- A Pine 18 in. diam. bears N40°W 57 lks. dist.,
- A Pine 30 in. diam. bears N67°E 41 lks. dist.,
- A Fir 24 in. diam. bears S70°E 31 lks. dist.,
- A Pine, 18 in. diam. bears S32°W 85 lks. dist.

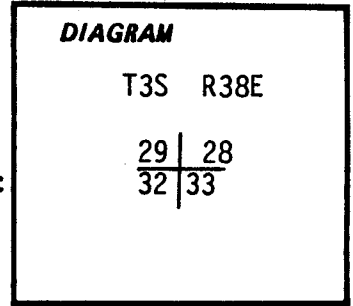

Description of corner evidence found:

Found the remains of the original S.E. and S.W. bearing trees:

A Douglas Fir, down and badly decayed, size indeterminate, with fragmentary scribing "S BT" visible on an unhealed double blaze (orig. S.E. bearing tree).

And a Ponderosa Pine Stump, well rotted, size indeterminate, with scribing "T2S R38E S32 BT" visible on detached pieces of wood lying nearby. (Orig. S.W. bearing tree). We remove the BT scribing from the area for display purposes.

The corner point, determined by reference to the found original bearing trees, is occupied by a rotten fence post at the corner of fences running South and West and remnants of a fence running North.

No evidence was found for the original corner post or the original N.W. or N.E. bearing trees.


Description of monument and accessories I established to perpetuate the original location of this corner:

At the corner point determined by reference to the remains of the original S.E. and S.W. bearing trees, we set a 2"x30" aluminum pipe 28" in the ground and in an existing mound of stones at the previously described fence corner, with aluminum cap, marked:

From which:

The original S.E. and S.W. bearing trees:

- A Douglas Fir, previously described, bears S70°E 20.5 feet to original location of the blazed face, (orig. S.E. bearing tree)
- And a Ponderosa Pine Stump, previously described, bears S32°W 56.1 feet, to original location of blazed face, (orig. S.W. bearing tree).



And new bearing trees marked on this date:

- A 14" Ponderosa Pine, scribed "T3SR38E S33 BT" on a double blaze, bears S43°E 63.1 feet,
- A 14" Ponderosa Pine, scribed "T3S R38E S28 BT" on a double blaze, bears N 60°E 29.7 feet,
- An 8" Douglas Fir, scribed "T3S R38E S29 BT" on a double blaze, bears N54°W 26.6 feet,
- And a 10" White Fir, scribed "T3S R38E S32 BT" on a double blaze bears S60°W 16.7 feet.

Attached brass washer marked "LS 1099" to lower blze of new BT's.


Magnetic Compass (20° East Declination)

Steel Tape.

October 25, 1984


Witnesses:

Gary Langlitz, LS 1099  
M.R. Humiston

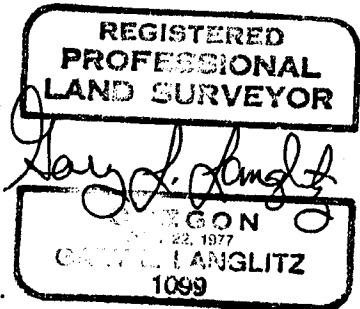

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....

..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

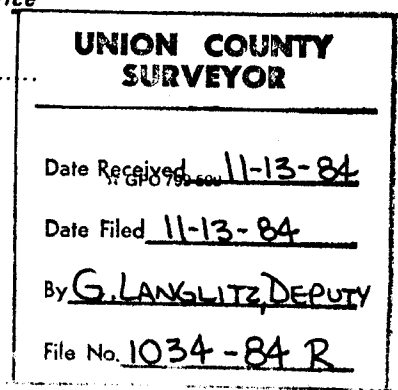

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017026

SECTION CORNER COMMON TO SECTIONS 28, 29, 32 AND 33

TWP. 3 S RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: October 20, 2017

LAT: 45 ° 16 ' 3.31055 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 4 ' 33.28696 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 593012.030 INT FT.

E: 8826087.731 INT FT.

TYPE: GPS

THETA: 1 ° 43 ' 8.8628649 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998960669

ELEV: 4500.27 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" aluminum pipe with 2 1/2" aluminum cap marked as shown, set in mound of stone.

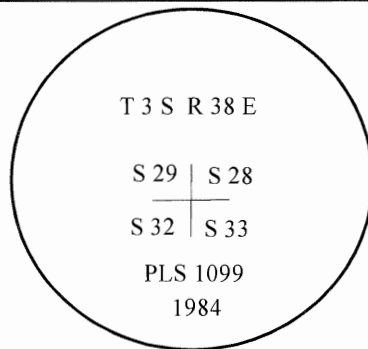

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986

RICK G. ROBINSON  
2219

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)