

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract Number 103, dated September 3rd, 1863. Surveyor General record states:
"Set post for 1/4 sec corner in mound of Stone "

Old Book Survey 121 Page 266 dated September 19, 1890 by J.L. Curtis states, "Found 1/4 corner " record shows nothing new set.

No record of subsequent monumentation found in Union County Survey Records.

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

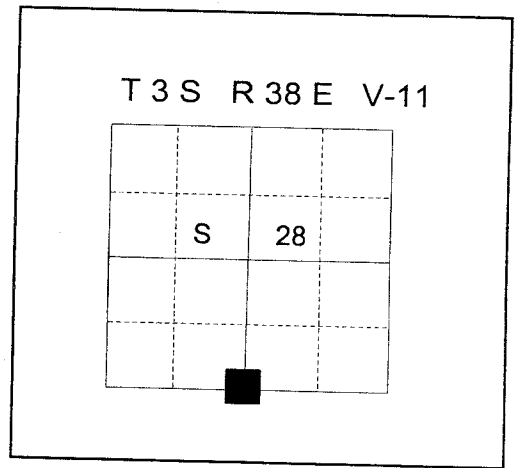

See Survey No. 040-2003

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At proportion position as determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which;

NEW BEARING OBJECTS:


A 12" Ponderosa Pine bears N 7°30' E, 52.79 feet, marked X BT

A 15" Ponderosa Pine bears N 45°40' E, 45.26 feet, marked ¼ S28 BT

An 18" Ponderosa Pine bears S 76°10' E, 83.64 feet, marked ¼ S33 BT

A 9" Ponderosa Pine bears N 74°45' W, 1.91 feet, marked Y BT

I hereby certify that the corner was monumented on October 31, 2003.
Witness: Rick Robinson, Gregory T. Blackman Jr.

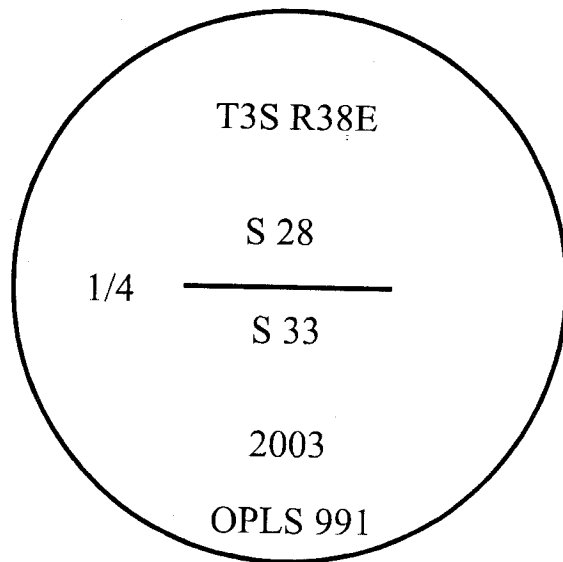

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

**UNION COUNTY
SURVEYOR**

Date Received 11/26/03

Date Filed 11/26/03

Filed By R. ROBINSON, DONTY

File Number 047-2003R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances to the accessories are to the center of the aluminum cap.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200334

1/4 CORNER COMMON TO SECTIONS: 28 & 33

TWP. 3 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: November 2003

LAT: 45 ° 16 ' 3.21216 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 118 ° 3 ' 56.29824 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 593081.595 INT FT.

E: 8828732.044 INT FT.

TYPE: GPS

THETA: 1 ° 43 ' 35.0947446 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998960661

ELEV: 4346.89 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" aluminum monument

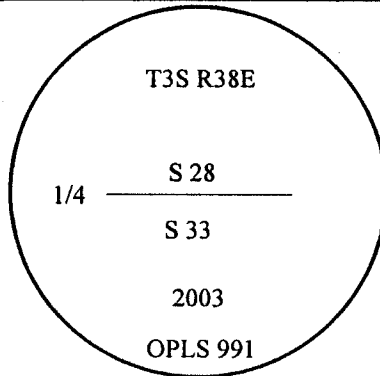

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)