

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson, under GLO Contract Number 103, dated September 3rd, 1863. Surveyor General record states:


Set a Post in mound of earth with charred stakes, pits as per instructions;

No record of subsequent monumentation found in Union County Survey Records

DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found

See Survey No. 034-2002

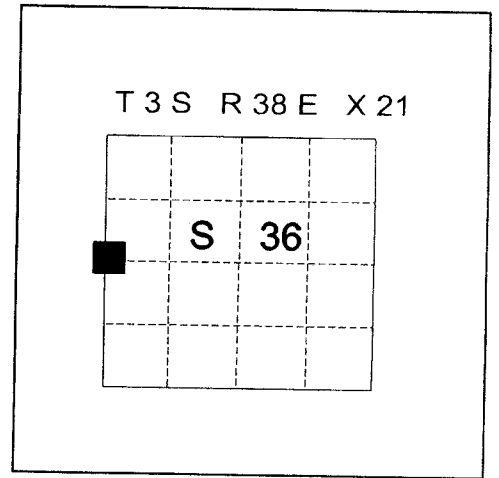

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportioned position, I set a 5/8"x 30" copper clad monument with 2 1/2" cap marked as shown, 36 inches in the ground, from which;

NEW BEARING OBJECTS:

A 5/8"x 30" inch iron pin with a 2" aluminum cap, bears East, a distance of 30.00 feet, marked NE RP

A 5/8"x 30" inch iron pin with a 2" aluminum cap, bears South 48° East, a distance of 35.67 feet, marked SE RP



A 5/8"x 30" inch iron pin with a 2" aluminum cap, bears South 47° West, a distance of 43.82 feet, marked SW RP

A 5/8"x 30" inch iron pin with a 2" aluminum cap, bears North 51° West, a distance of 38.68 feet, marked NW RP

I hereby certify that the corner was monumented on September 4, 2002

Witnesses:

Norbert Volny and Gregory T. Blackman Jr.

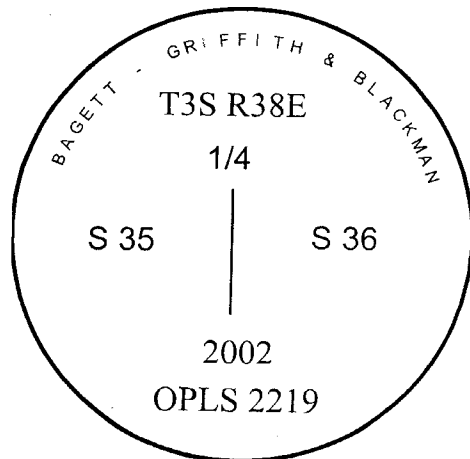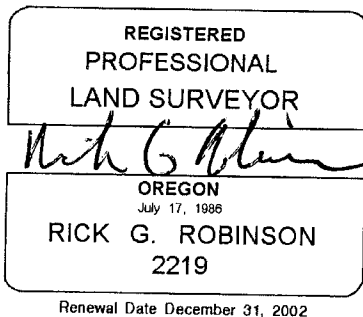

UNION COUNTY SURVEYOR

Date Received 9/17/02

Date Filed 9/18/02

Filed By Gregory T. Blackman Jr.

File Number 025-2002 R

I used a Leica 530 GPS in the establishment of the new accessories. The basis of bearing is the same as shown on Survey No. 034-2002, the distances are to the center of the aluminum cap.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200605

1/4 SECTION CORNER COMMON TO SECTIONS 35 and 36

TWP. 3 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: October 3, 2006

LAT: 45 ° 15 ' 37.32837 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 0 ' 51.74953 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 590863.290 INT FT.

E: 8842004.374 INT FT.

TYPE: GPS

THETA: 1 ° 45 ' 45.9741117 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.999895858

ELEV: 2709.60 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8"x30" "copper clad pin with
2 1/2" brass cap marked:

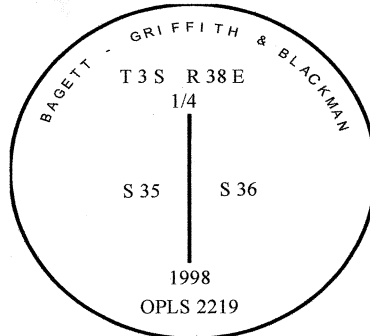

Renewal Date: December 31, 2006

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)