

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
NONE

No record of subsequent monumentation found in
Union County Survey Records

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey No. 034-2002

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportioned position, I set a 5/8"x 30"
iron pin with 2 1/2" aluminum cap marked as shown,
30 inches in the ground, from which;

NEW BEARING OBJECTS:


A 5/8"x 30" inch iron pin with a 2" aluminum cap, bears South 27° East, a
distance of 27.66 feet, marked SE RP

A 5/8"x 30" inch iron pin with a 2" aluminum cap, bears South 36° West, a
distance of 51.24 feet, marked SW RP

I hereby certify that the corner was monumented on September 5, 2002

Witnesses:

Norbert Volny and Gregory T. Blackman Jr.

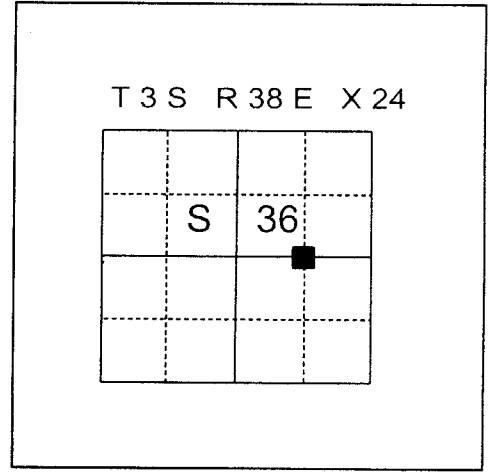


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2002

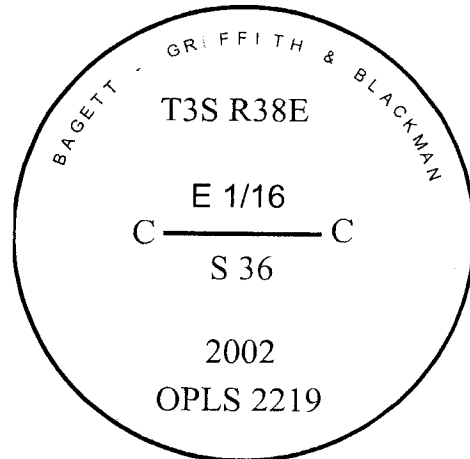

I used a Leica TCA 1100 total station and
prism in the establishment of the new
accessories. The basis of bearing is the
same as shown on Survey No. 034-2002, the
distances are to the center of the aluminum
cap.

**UNION COUNTY
SURVEYOR**

Date Received 9/17/02

Date Filed 9/18/02

Filed By *Greg T. Blackman*

File Number 028-2002R