


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by David P. Thompson under GLO contract number 103 dated September 3rd, 1863. Surveyor General field notes state:
Set post for 1/4 section corner in mound of earth with charred stake, pits, trench as per instructions.

T 3 S R 39 E X-05



In Union County Survey #188 dated 1953, Morgan set a 1" x 3' pipe.
In Union County Survey #12-62 James Voelz finds the 1/4 cor. pipe in place.
In Union County Survey #027-1990 Gary Langlitz found a 1" iron pipe extending 10" above ground, 2'S and 1'W of corner of N and W fences.
In Union County Survey #006-2013 Theodore Langton found the 1" pipe as per survey 27-90.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 1" iron pipe, 2" below ground and in a mound of dirt.

Fence corner, which appears to be recent construction, from which fences run North and West bears North 49° East, a dist. of 4.25 ft.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the center of the found iron pipe I insert a 5/8" x 30" iron pin, 29" in the pipe, with a 2 1/2" aluminum cap marked as shown below, from which:


NEW BEARING OBJECTS:

A 5/8" x 30" iron pin bears North 34° East a dist. of 19.65 ft., with 1 1/2" aluminum cap marked Union County Surveyor NE RP.
A 5/8" x 30" iron pin bears South 56° East a dist. of 8.80 ft., with 1 1/2" aluminum cap marked Union County Surveyor SE RP.
A 5/8" x 30" iron pin bears South 56° West a dist. of 11.60 ft., with 1 1/2" aluminum cap marked Union County Surveyor SW RP.
A 5/8" x 30" iron pin bears North 40° West a dist. of 13.65 ft., with 1 1/2" aluminum cap marked Union County Surveyor NW RP.

I hereby certify that the corner was perpetuated on April 9, 2019.
Witness: Kyle A. Tucker



Renewal Date: June 30, 2021

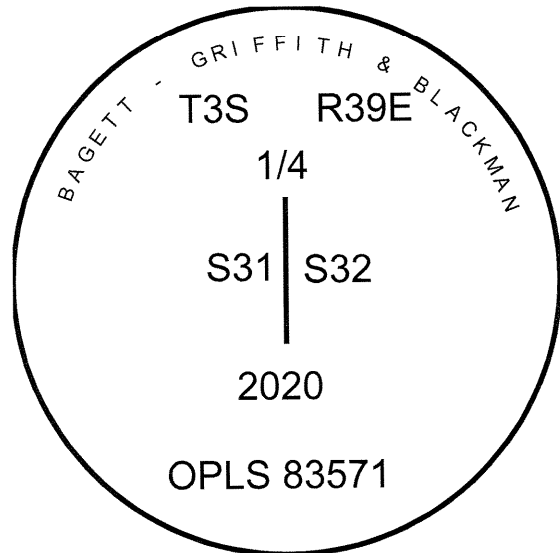

UNION COUNTY SURVEYOR

Date Received 4/15/2020

Date Filed 4/15/2020

Filed By [Signature]

File Number 018-2020R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination. The bearing and distances are to the center of the aluminum caps.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2020026

1/4 SECTION CORNER COMMON TO SECTIONS 31 AND 32

TWP. 3 S RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: April 9, 2020

LAT: 45 ° 15 ' 37.88750 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 58 ' 23.61150 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 591248.509 INT FT.

E: 8852592.780 INT FT.

TYPE: GPS

THETA: 1 ° 47 ' 31.0315255 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9998958624

ELEV: 2696.85 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8" iron pin set inside of 1" iron pipe, with
2 1/2" aluminum cap marked as shown

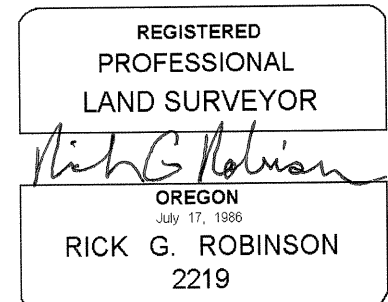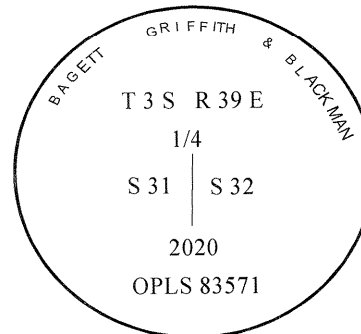

Renewal Date: December 31, 2020

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)