

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson, contract No. 103, dated September 3, 1863. Surveyor General record states:

Set post for 1/4 Sec corner in mound of stone.

Survey No. 057-1991 and Minor Partition Nos. MP 1992-015, MP 1993-020, MP 1995-027, MP 1997-023, and 2000-009 all use proportionate position

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey No. 024-2001

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position established by Survey No. 024-2001, I set a 2 1/2" x 30" aluminum monument, marked as shown below, 24" in the ground with mound of stone 2 ft. base to top of cap, from which:

A 5/8" x 30" iron pin with 1 1/2" aluminum cap in a East-West fenceline bears N74°34'E, a distance of 11.33 feet, marked BGB SURVEY MARKER NE RP.

A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S47°03'E, a distance of 8.81 feet, marked BGB SURVEY MARKER SE RP.


A 5/8" x 30" iron pin with 1 1/2" aluminum cap in a North-South fenceline bears S43°34'W, a distance of 23.06 feet, marked BGB SURVEY MARKER SW RP.

A 5/8" x 30" iron pin with 1 1/2" aluminum cap in a East-West fenceline bears N74°08'W, a distance of 11.89 feet, marked BGB SURVEY MARKER NW RP.

I set a steel fence post 1 ft. North of monument. Corner position falls South 3.0 feet and East 15.9 feet from fence corner North, South, East, and West.

I hereby certify that the corner was monumented on June 15, 2001. Witness: Norbert Volny and Gregory T. Blackman, Jr.


T 3 S R 40 E G-17

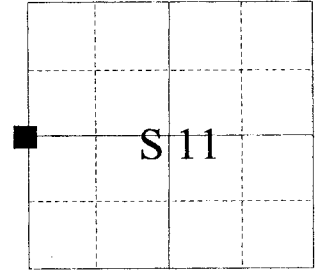

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2002

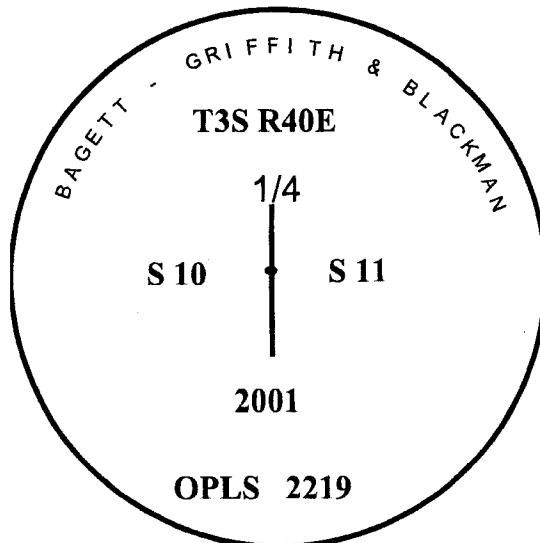

UNION COUNTY SURVEYOR

Date Received 6/20/01

Date Filed 7/2/01

Filed By [Signature]

File Number 029-2001R

I used a Leica 530 GPS unit in the establishment of the new accessories. The Basis of Bearings is the same as that shown on Survey No. 024-2001. The distances are to the center of a 5/8"x30" iron pin with 1 1/2" aluminum cap.