

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by David T. Thompson under GLO contract number 103, dated September 3, 1863. Surveyor General record states:

Set post for 1/4 sec corner in mound of stone

Corner was remonumented by Alonzo Gesner under GLO contract number 683, dated June 7, 1880. Surveyor General record states:

The 1/4 sec cor which is a post marked 1/4 on the W face in mound of rock. I marked;
 A tamarack 20 in diam bears N21°E 19 lks dist marked 1/4S BT
 A fir 18 in diam bears S28°W 9 lks dist marked 1/4S BT

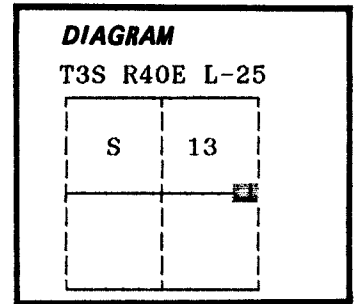

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner post.

Found a 28 inch diameter tamarack N21°E, 19 lks, a rotted stump with scribing visible.

Found no evidence of the Southwest bearing tree.

Distance to the original bearing tree is to the face of the blaze.

See map of survey dated August, 1988.

UNION COUNTY SURVEYOR	
Date Received	<u>9-15-88</u>
Date Filed	<u>9-15-88</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>118-88 R</u>

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing an distance from the found original bearing tree, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

New BTs:

A 14 inch diameter White Fir bears S12°W, 32.42 feet marked 1/4 S13 BT
 A 15 inch diameter White Fir bears S51°W, 27.59 feet marked X BT
 Set a steel fencepost 5.85 feet North with 54-9 and 54-2 signs attached.


Raised a mound of stone around monument, 3 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost 5.85 feet North with 54-9 and 54-2 signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 28, 1988.

Witnesses: Greg Blackman and Jeff Petersen

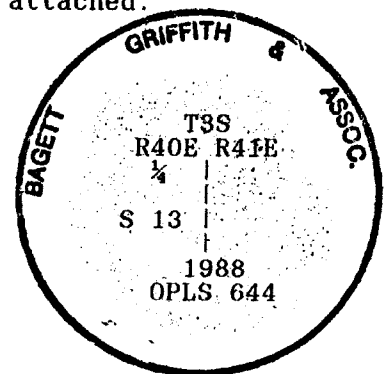

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)