


**UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner Not Previously Established

No record of monumentation found in UNION COUNTY survey records.

T 3 S R 40 E R-14

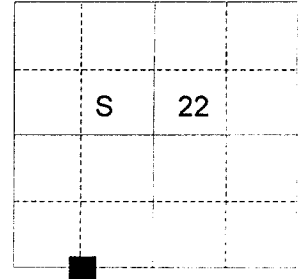

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

NONE

See Union County Minor Partition Plat Number 1999-02

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by said partition plat, I set a 5/8" x 30" iron pin with 2" aluminum cap marked as shown below, 16" in the ground to bedrock, with surrounding mound of stone, from which:

**NEW BEARING OBJECTS:**

A 5/8" x 30" iron pin with a 1 1/2" aluminum cap marked BGB SURVEY MARKER SW RP bears South 29° West, a distance of 7.98 feet.

A 5/8" x 30" iron pin with a 1 1/2" aluminum cap marked BGB SURVEY MARKER NW RP bears North 45° West, a distance of 7.98 feet.

Corner position falls 15 ft. West and 30 ft. North of an existing fence corner

I hereby certify that the corner was monumented on March 1, 1999.

Witnesses: Norbert Volny and Greg Engalgau


**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Rick G. Robinson*

**OREGON**  
July 17, 1966

**RICK G. ROBINSON**  
2219

Renewal Date December 31, 2000

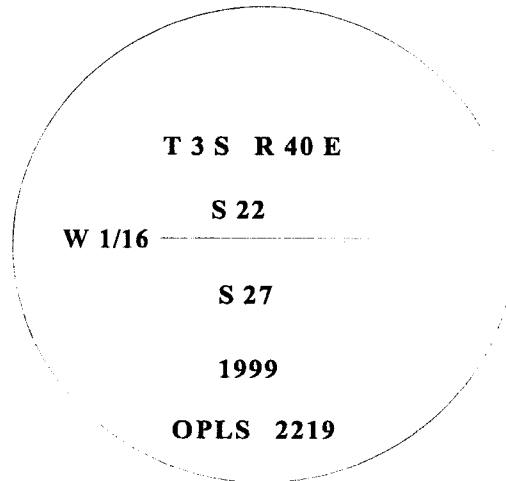

**UNION COUNTY  
SURVEYOR**

Date Received 3/3/99

Date Filed 3/3/99

Filed By *Greg T. Shaw*

File Number 008-1999R

I used a magnetic compass and steel tape in the establishment of new accessories. I used a magnetic declination of 18° East, and the distance to the bearing object is to a punch mark in the center of the cap.