


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL COR. ESTABLISHMENT:
Corner not previously established.

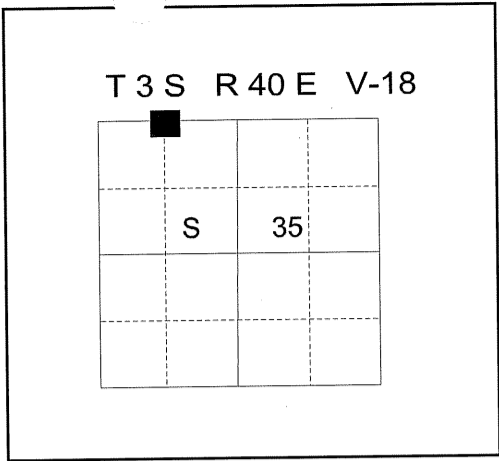

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 018-2007

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At true proportionate position, I set a 5/8"x30" rebar monument 24" in the ground, with 2" Aluminum Cap marked as shown, with mound of stone 1 ft. base to top of cap, from which;

BEARING OBJECTS:

A 12" Ponderosa Pine bears South 24° West, a distance of 40.87 feet, marked W1/16 S35 BT.
A 16" Douglas Fir bears North 3° West, a distance of 31.20 feet, marked W1/16 S26 BT.

I hereby certify that the corner was monumented on July 24, 2007.
Witness: Keith Wolford, Dave Wolf, Jeff Hsu

REGISTERED
PROFESSIONAL
LAND SURVEYOR

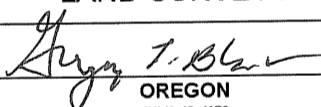

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: Dec. 31, 2007

BAGETT - GRIFFITH & BLACKMAN

T3S R40E

W 1/16 ——— S 26

S 35

2007
OPLS 991

**UNION COUNTY
SURVEYOR**

Date Received 8/26/07

Date Filed 9/7/07

Filed By R. ROBINSON, DEPUTY

File Number 018-2007R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances to the accessories are from a spike set in the root crown on the right hand side of the trees to the center of the aluminum cap.