


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established.

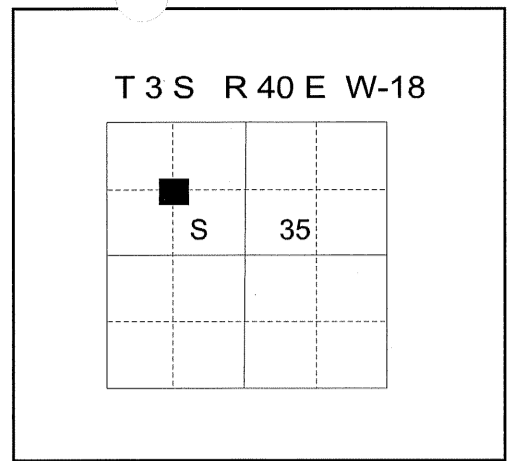

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey Number 018-2007

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At true proportionate position, I set a 5/8"x30" rebar monument 28" in the ground, with 2" Aluminum Cap marked as shown, from which;

BEARING OBJECTS:

A 16" Ponderosa Pine bears North 49° East, a distance of 24.50 feet, marked NW1/16 S35 BT.

A 14" Douglas Fir bears North 20° West, a distance of 41.50 feet, marked NW1/16 S35 BT.

I hereby certify that the corner was monumented on July 24, 2007.


Witness: Keith Wolford, Dave Wolf, Jeff Hsu

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: Dec. 31, 2007

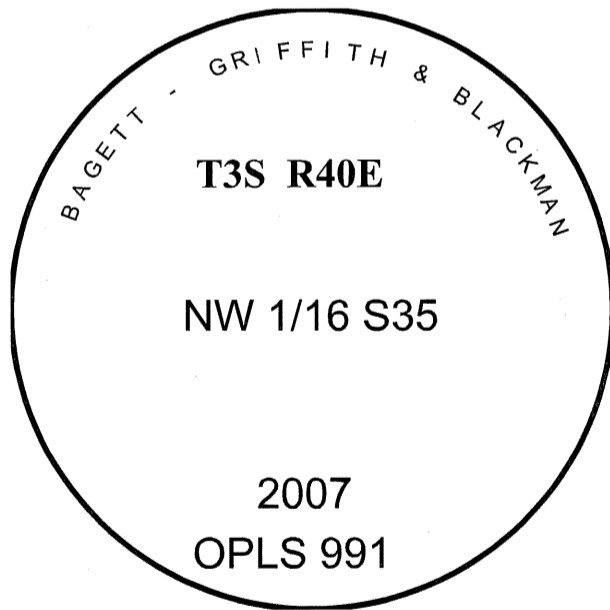

**UNION COUNTY
SURVEYOR**

Date Received 8/26/07

Date Filed 9/7/07

Filed By R. Robinson, Deputy

File Number 019-2007R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances to the accessories are from a spike set in the root crown on the right hand side of the trees to the center of the aluminum cap.