


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established.

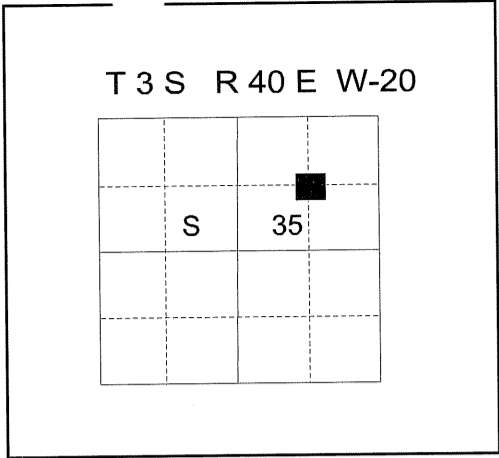

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey Number 018-2007

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At true proportionate position, I set a 5/8"x30" rebar monument 28" in the ground, with 2" Aluminum Cap marked as shown, from which;

BEARING OBJECTS:

A 20" Douglas Fir bears East, a distance of 11.92 feet, marked NE1/16 S35 BT.  
A 13" Tamarack bears South 4° West, a distance of 21.82 feet, marked NE1/16 S35 BT.

I hereby certify that the corner was monumented on July 24, 2007.

Witness: Keith Wolford, Dave Wolf, Jeff Hsu

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973

**GREGORY T. BLACKMAN**  
991

Renewal Date: Dec. 31, 2007

BAGETT - GRIFFITH & BLACKMAN

**T3S R40E**

**NE 1/16 S35**

2007  
OPLS 991

**UNION COUNTY  
SURVEYOR**

Date Received 8/26/07

Date Filed 9/17/07

Filed By R. Robinson, Deputy

File Number 020-2007R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances to the accessories are from a spike set in the root crown on the right hand side of the trees to the center of the aluminum cap.