

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by David P. Thompson in GLO Contract Number 103, dated September 3, 1863. Surveyor General field notes state:

Set post for 1/4 Sec. corner in mound of earth with charred state, pits trenched as per instructions.

Corner reset by James W. Kimbrell in Old Book Survey Page 7, dated April 8, 1887. Survey Notes state:

The original corner being out of place. Set Stone 8x9x23 ins. for 1/4 Sec corner bet. Sec 31 and 32.

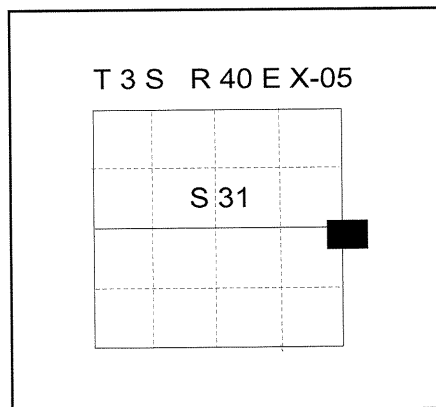

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

No evidence could be found.

**SEE SURVEY NUMBER 003-2015**

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe, 29" in the ground, with a 2 1/2" aluminum cap, marked as shown below, in a collar of stone 1 ft. diam., from which:

A 5/8" x 30" iron pin bears North 1°00' East, a distance of 20.07 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER N RP.

A 5/8" x 30" iron pin bears North 89°00' East, a distance of 5.14 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER E RP.

A 5/8" x 30" iron pin bears South 1°00' West, a distance of 19.90 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER S RP.

A 5/8" x 30" iron pin bears North 87°10' West, a distance of 16.29 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER W RP.


Set a steel fence post approximately 1 foot North of corner monument. Corner falls approximately 5 ft. West of a North/South running fenceline.

I hereby certify that the corner was monumented on January 26, 2015

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*[Signature]*  
OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2015

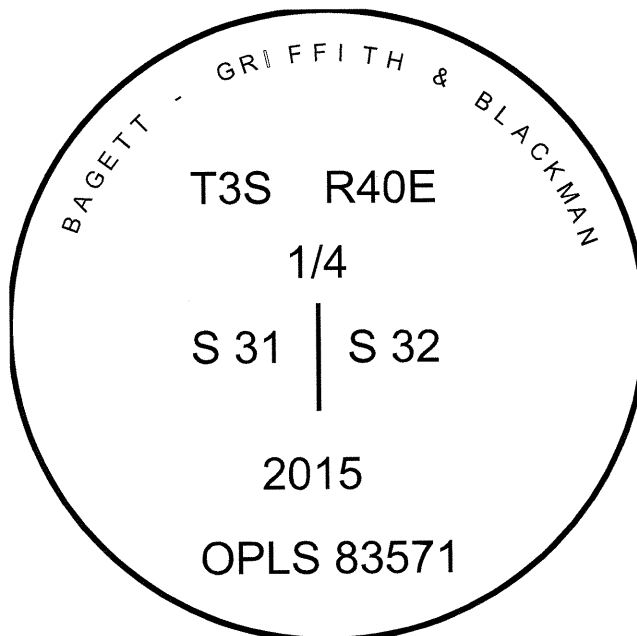

**UNION COUNTY  
SURVEYOR**

Date Received 1/29/15

Date Filed 1/29/15

Filed By *[Signature]*

File Number 007-2015 R

I used a Leica GS-15 RTK GPS in the establishment of the accessories. Bearings and distances are to the center of the aluminum caps. Basis of bearings is as per Survey Number 003-2015.