


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by James W. Kimbrell in Old Book Survey Page 7, dated April 8, 1887. Survey Notes state:

Set Stone 8x6x20 ins for Center SE 1/4 Sec 31.

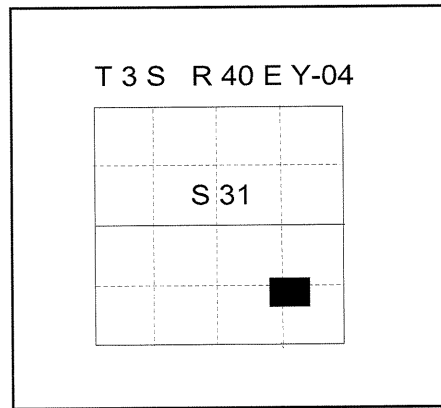

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

No evidence of Kimbrell stone could be found.

**SEE SURVEY NUMBER 003-2015**

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron pin, 30" in the ground, with a 2 1/2" aluminum cap, marked as shown below, from which:

A 5/8" x 15" iron pin bears North 1°00' East, a distance of 20.00 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER N RP.

A 5/8" x 15" iron pin bears East, a distance of 20.00 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER E RP.

Set a steel fence post approximately 0.5 feet North of corner monument. Monument falls approximately 37 feet South and 10 feet West of a fence corner. I hereby certify that the corner was monumented on January 26, 2015

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**



**OREGON**  
June 2, 2010  
**JEFFREY S. HSU**  
83571

Renewal Date: June 30, 2015

BAGETT - GRIFFITH & BLACKMAN

**T3S R40E**

**SE 1/16 S 31**

**2015**

**OPLS 83571**

**UNION COUNTY  
SURVEYOR**

Date Received 1/29/15

Date Filed 1/29/15

Filed By [Signature]

File Number 008-2015R

I used a Leica GS-15 RTK GPS in the establishment of the accessories. Bearings and distances are to the center of the aluminum caps. Basis of bearings is as per Survey Number 003-2015.