


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by James W. Kimbrell in Old Book Survey Page 7, dated April 8, 1887. Survey Notes state:

Set Stone 8x8x16" for 1/8 corner.

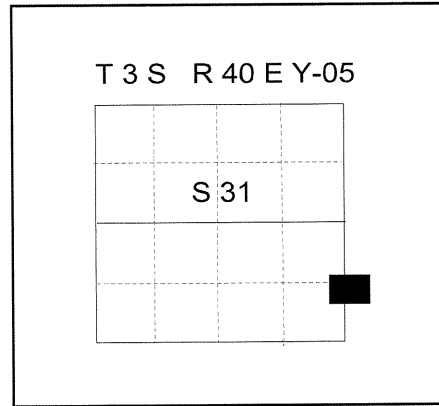

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of Kimbrell stone could be found.

SEE SURVEY NUMBER 003-2015

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" iron pin, 30" in the ground, with a 2 1/2" aluminum cap, marked as shown below, from which:

A 5/8" x 30" iron pin bears North 1°00' East, a distance of 20.00 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER N RP.

A 5/8" x 30" iron pin bears West, a distance of 20.00 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER W RP.

Set a steel fencepost approximately 0.5 feet North of corner monument. Monument falls approximately 34 feet North and 13 feet West of a fence corner.

I hereby certify that the corner was monumented on January 26, 2015

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

BAGETT - GRIFFITH & BLACKMAN

T3S R40E

S 1/16

S 31 | S 32

2015

OPLS 83571

UNION COUNTY
SURVEYOR

Date Received 1/29/15

Date Filed 1/29/15

Filed By [Signature]

File Number 009-2015R

I used a Leica GS-15 RTK GPS in the establishment of the accessories. Bearings and distances are to the center of the aluminum caps. Basis of bearings is as per Survey Number 003-2015.