


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:  
Corner not previously established.

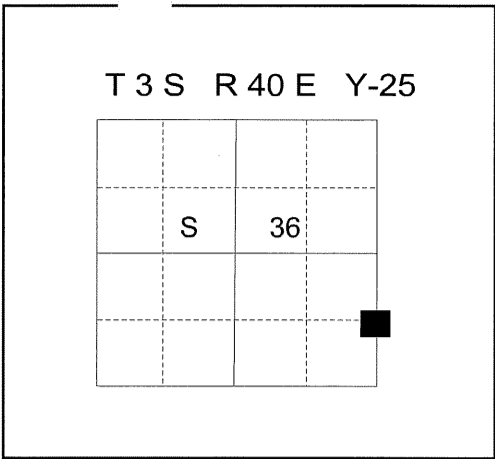

DESCRIPTION OF CORNER EVIDENCE FOUND:  
NONE

See Survey Number 034-2008

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At true proportionate position, I set a 5/8"x30" rebar monument 30" in the ground, with 2" Aluminum Cap marked as shown, from which;

BEARING OBJECTS:

A 17" Western Larch bears North 83° West, a distance of 33.80 feet, marked S1/16 S36 BT.

A 16" Western Larch bears North 32° West, a distance of 10.00 feet, marked S1/16 S36 BT.

I hereby certify that the corner was monumented on October 3, 2008.  
Witness: Gregory T. Blackman Jr., Jeff Hsu

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 13, 1973

**GREGORY T. BLACKMAN**  
991

Renewal Date: Dec. 31, 2009

BAGETT - GRIFFITH & BLACKMAN

**T3S R40E**

S 1/16

S 36

2008

OPLS 991

**UNION COUNTY  
SURVEYOR**

Date Received 10/6/08

Date Filed 10/6/08

Filed By R. Robinson, Deputy

File Number 008-2008R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances to the accessories are from a spike set in the root crown on the right hand side of the trees to the center of the aluminum cap.