


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683, dated June 7, 1880. Surveyor General record states:

Set fir post 4 ft long 4 in sq 24 inches in the ground for 1/4 sec cor marked 1/4 S19 on the W and S20 on the E faces, from which;

A noble fir 18 in diam bears S38°E, 22 lks dist marked 1/4 S20 BT
A noble fir 15 in diam bears N63°W, 22 lks dist marked 1/4 S19 BT

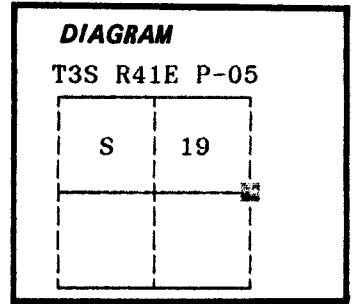

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner or it's accessories.

See map of survey dated August, 1988.

UNION COUNTY SURVEYOR	
Date Received	<u>9-15-88</u>
Date Filed	<u>9-15-88</u>
By	<u>G. LANGLITZ DEPUTY</u>
File No.	<u>125-88 R</u>

Description of monument and accessories I established to perpetuate the original location of this corner:

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which:


New BTs:
A 23 inch diameter Spruce bears S7°E, 73.06 feet marked 1/4 S20 BT
A 22 inch diameter White Fir bears S55°W, 116.12 feet marked 1/4 S19 BT

Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 2, 1988.

Witnesses: Greg Blackman and Jeff Petersen

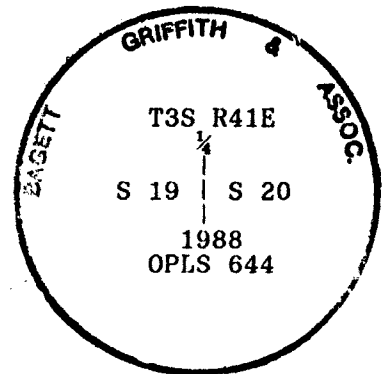

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by

(COUNTY OFFICIAL) (DEPUTY)