


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states: Set basalt stone 15x12x7 ins for 1/4 sec cor from which;

A yellow pine 18 in diam bears S62°15'E 110 lks dist  
A yellow pine 26 in diam bears N6°W 24 lks dist

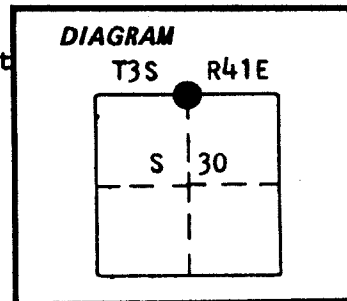

No record of subsequent monumentation found in county records  
Description of corner evidence found:

Found a stone 15x9x7 inches marked 1/4 S19 firmly set in mound of stone

Found a 36 inch diameter P. Pine live and vigorous with blaze evident North 2 1/2° West, 15.6 feet to face of blaze  
(Record N6°W 24 lks)


**UNION COUNTY SURVEYOR**  
Date Received 7-28-86  
Date Filed 8-19-86  
By G. LANGLITZ, DEPUTY  
File No. 100-86 R

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe, 18" in ground with aluminum cap marked as shown with mound of stone 2 ft. base to top of cap from which:

New BT  
A 16 inch diameter Red Fir bears S11°E 43.83 feet marked 1/4 S30 BT

Buried the original corner stone South and alongside of monument  
Set steel fencepost approximately 5 feet South with 54-9 sign attached and 54-2 sign attached

Corner remonumented June 17, 1986  
Witnesses: Greg Blackman and Rick Robinson

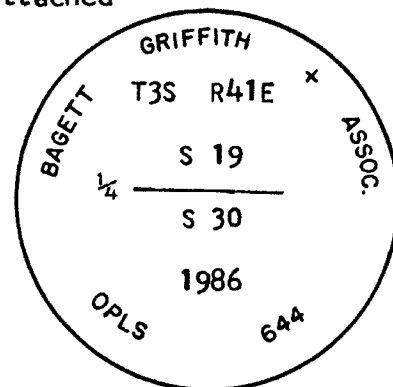

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....

(COUNTY OFFICIAL)

(DEPUTY)