


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states: Set basalt stone 20x14x8 ins for 1/4 sec cor from which;

A yellow pine 34 in diam bears N67°W 13 lks dist
A red fir 14 in diam bears S12E 80 lks dist

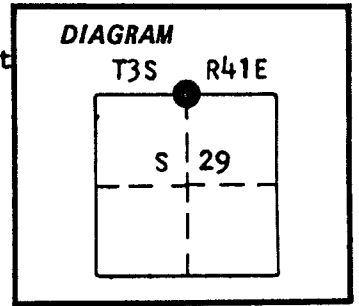

No record of subsequent remonumentation found in county records.
Description of corner evidence found:

A stump hole bears S 12° E, 80 lks.

A 38" Ponderosa Pine snag 50+ feet high bears N 67° W, 13 lks, scribes visible.


Description of monument and accessories I established to perpetuate the original location of this corner: At record bearing and distance from the original bearing trees, I set a 2 1/2'x30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground and raised a mound of stone with a 3 foot base to top of cap, From which:

A 5'x4'x6' high rock outcrop bears S 49° E, 21.11 feet, marked X B0.

A 26 inch Ponderosa Pine bears N 37° W, 73.51 feet, marked 1/4 S 20 BT.

Set a steel fence post approximately 5 feet South with a 54-4 sign attached.

Corner set; 9/8/86
Witness: Rick Robinson

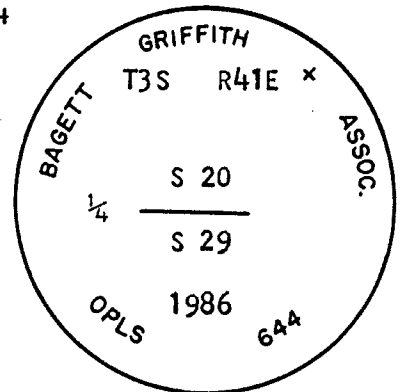

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

UNION COUNTY SURVEYOR
(COUNTY OFFICIAL) (DEPUTY)
Date Received 10-20-86
Date Filed 10-27-86
By G. LANGLITZ DEPUTY
File No. 215-86R

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

V-21