


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:

Set basalt stone 22x12x6 for 1/4 sec cor from which;

- A black pine 4 in diam bears N64°30'E 12 lks dist
- A black pine 4 in diam bears N74°W 19 lks dist

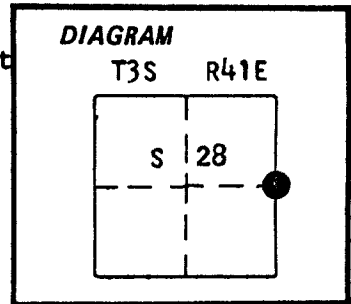

No record of subsequent remonumentation found in county record.
Description of corner evidence found:

- Stone 20"x11"x6" marked 1/4, set 8 inches in the ground in mound of stone.
- A 9" Lodgepole Pine bears N 64 1/2° E, 12 lks, alive and vigerous, scribes visible
- A Lodgepole Pine stump bears N 74° W, 19 lks, uprooted with BT blaze evident.


Description of monument and accessories I established to perpetuate the original location of this corner: At stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground and raised a mound of stone with a 2 foot base to top of cap, from which:

An 8 inch Lodgepole Pine bears N 23° E, 13.40 feet, marked 1/4 S27 BT.

A 9 inch Lodgepole Pine bears N 42° W, 9.96 feet, marked 1/4 S28 BT.

Set a steel fence post approximately 5 feet South with a 54-4 sign attached.

Corner set: 9/8/86
Witness: Rick Robinson
Buried Stone South of Cap

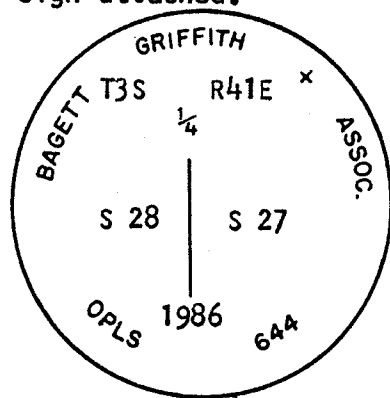

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL) **UNION COUNTY SURVEYOR** (DEPUTY)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ DEPUTY

File No. 219-86 R

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE • 1983-793-276

V-17