


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

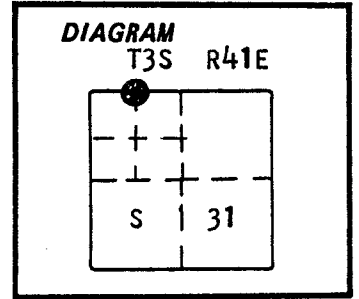

Description of corner evidence found:

NONE

**UNION COUNTY SURVEYOR**

---

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGRISH, DEPUTY

File No. 242-86 R

See map of survey number 30-86 filed in the office of the Union County Surveyor

Description of monument and accessories established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground and raised a small mound of stone around the cap, from which:

A 14 inch Douglas Fir bears S 44° W, 28.94 feet, marked W 1/16 S 31 BT.

A 12 inch Tamarack bears N 41° W, 66.60 feet, marked W 1/16 S 30 BT.


Set a steel fence post approximately 5 feet West with a 54-9 sign attached.

Corner set 9/9/86

Witness: Greg Blackman, Rick Robinson

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

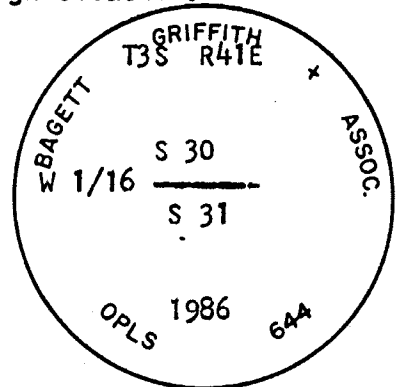

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)