


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

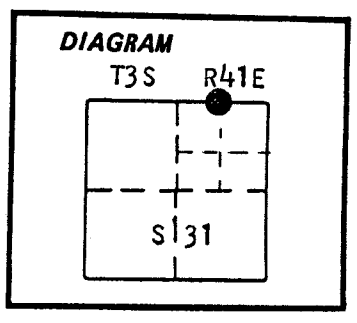

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR

Date Received 10-20-86
 Date Filed 10-27-86
 By G. LANGLITZ Deputy
 File No. 222-86 R

See map of survey number 29-86 filed in the office of the Union County Surveyor
Description of monument and accessories I established to perpetuate the

original location of this corner: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground and raised a small mound of stone around cap, from which:


A 10 inch Ponderosa Pine bears N 49° E, 53.21 feet, marked E 1/16 S30 BT.

A 10 inch White Fir bears S 41° E, 78.16 feet, marked E 1/16 S 31 BT.

Set a steel fence post approximately 5 feet West with a 54-9 and 54-2 sign attached.

Corner set: 9/9/86

Witness: Greg Blackman, Rick Robinson

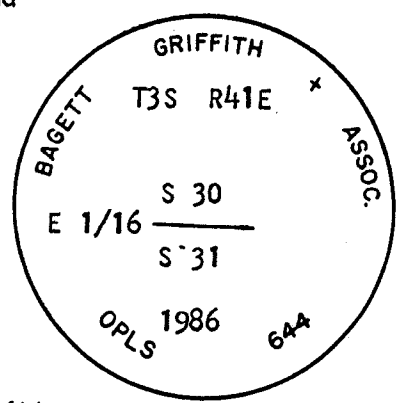

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]
 OREGON
 JULY 10, 1964
 DUANE I. GRIFFITH
 644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

V-24