


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:

Set basalt stone 28x14x8 ins for 1/4 sec cor from which;

- A tamarack 28 in diam bears S63°30'E 44 lks dist
- A noble fir 12 in diam bears N3°30'W 46 lks dist

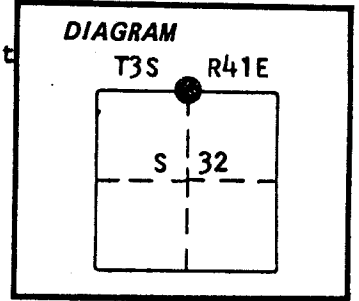

No record of subsequent remonumentation found in the county record.
Description of corner evidence found:

Stone 20"x13"x8" with broken top and chisle marks at break

A 34" Tamarack stump bears S 63 1/2° E, 44 lks. Opened stump and found BT scribe. There is also 8 feet of log lying next to stump with blaze evident, I opened blaze and found the scribes.

A stump hole bears N 3 1/2° W, 46 lks.

See map of survey number 29-86 filed in the office of the Union County Surveyor Description of monument and accessories I established to perpetuate the original location of this corner: At the stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

A 25 inch Tamarack bears N 68° E, 68.49 feet, marked 1/4 S29 BT.

A 16 inch Tamarack bears S 50° E 131.12 feet, marked 1/4 S-32 BT.

Set a steel fence post approximately 5 feet East with a 54-4 sign attached.

Corner set: 9/5/86
Witness: Rick Robinson
Buried stone West of cap.


**UNION COUNTY
SURVEYOR**

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGUITZ, DEPUTY

File No. 224-86 R

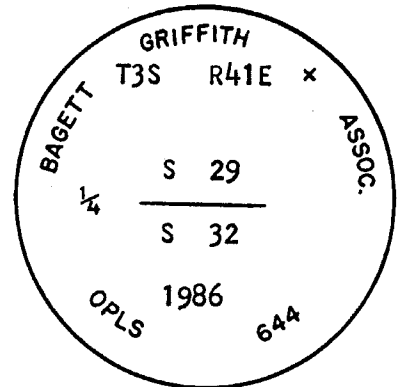

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1964
**DUANE I. GRIFFITH
644**

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

Subdivision of Section 32,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

FEET	<p>A Douglas fir, 9 ins. diam., bears S. 44° E., 11.8 ft. dist., mkd. C 1/4 S32 BT.</p> <p>N. 0° 48' 18" W., beginning new measurement.</p>
160	Dirt road, 16 ft. wide, bears N. 72° E. and S. 72° W.
2614.37	The 1/4 sec. cor. of secs. 29 and 32, remonumented by Griffith in 1986; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, with aluminum cap, 2 1/2 ins. diam., mkd.
	<p>T 3 S R 41 E</p> <p>S 29</p> <p>1/4</p> <p>S 32</p> <p>1986</p>
	from which the remains of an original bearing tree
	A rotted tamarack stump, 24 ins. diam., bears S. 63 1/2° E., 29.0 ft. dist., with fragmentary scribe marks visible on partially healed blaze.
	and bearing trees mkd. by Griffith
	A tamarack, 24 ins. diam., bears N. 67 1/4° E., 68.4 ft. dist., with healed blazes at waist height and the base.
	A tamarack, 15 ins. diam., bears S. 50° E., 131.1 ft. dist., with healed blazes at waist height and the base.
	The original stone, 20 x 13 x 8 ins., was found buried alongside to the west of the aluminum pipe.
	A metal fence post bears E., 5.0 ft. from cor.
	From the 1/4 sec. cor. of secs. 32 and 33, remonumented by Griffith in 1986; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, with collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.
	<p>T 3 S R 41 E</p> <p>1/4</p> <p>S 32 S 33</p> <p>1986</p>
	from which the remains of an original bearing tree

T3S 41V07

T3S 41V07

UNION COUNTY SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature]

File No. 190-2013R