


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:



Set basalt stone 15x9x8 ins for 1/4 sec cor from which;
A noble fir 8 in diam bears N36°30'E 11 lks dist
A noble fir 20 in diam bears S8°E 25 lks dist

No record of subsequent remonumentation found in county records.
Description of corner evidence found:

- Stone 14"x9"x8", marked 1/4 firmly set.
- A 12" Sub Alpine Fir bears N 36 1/2° E, 11 lks. alive and vigerous, scribes visible Bt is being overgrown by larger tree on the north.
- An 18" Noble Fir stump bears S 8° E, 25 lks. Nothing visible.

Description of monument and accessories I established to perpetuate the original location of this corner: At stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

- An 18 inch Hemlock bears S 76° W, 12.67 feet, marked 1/4 S 33 BT.
- A 14 inch SubAlpine Fir bears N 3° W, 43.19 feet, marked 1/4 S 28 BT.
- Set a steel fence post approximately 5 feet East with a 54-4 sign attached.


Corner set: 9/4/86
Witness: Greg Blackman, Rick Robinson, Dave Dahlstrom

Buried Stone North

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten Signature

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

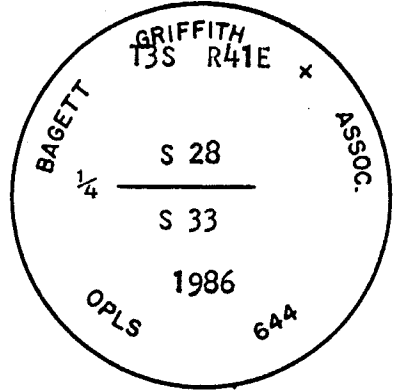

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

UNION COUNTY SURVEYOR

(COUNTY OFFICIAL) (DEPUTY)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ, DEPUTY

File No. 226-86 R

Form R6-7100-57 (9/71)

★ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

I-6