


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:



Set a fir post 5 ft long 4 ins sqr for cor to secs 28,29,32 and 33 from which;

- A spruce 10 in diam bears N12°30'E 15 lks dist
- A noble fir 10 in diam bears S85°E 65 lks dist
- A tamarack 30 in diam bears S65°45'W 45 lks dist
- A spruce 9 in diam bears N38°W 25 lks dist

No record of subsequent monumentation found in county records

Description of corner evidence found:

Found a 34 inch diameter tamarack S65 3/4°W 29.7 feet cut down, with scribes visible

**UNION COUNTY SURVEYOR**

---

Date Received 7-28-86

Date Filed 8-19-86

By G. LANGLITZ DEPUTY

File No. 105-86 R

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from the found bearing tree, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground from which;


New BTs

- A 10 inch diameter tamarack bears N70°E 42.62 feet marked T3S R41E S27 BT
- A 8 inch diameter Tamarack bears S11°E 18.98 feet marked T3S R41E S34 BT
- A 12 inch diameter fir bears S67°W 35.83 feet marked T3S R41E S33 BT
- A 7 inch diameter Tamarack bears N30°W 68.09 feet marked T3S R41E S28 BT

Set steel fencepost approximately 5 feet North with 54-9 sign

Corner monumented June 18, 1986

Witnesses: Greg Blackman and Rick Robinson

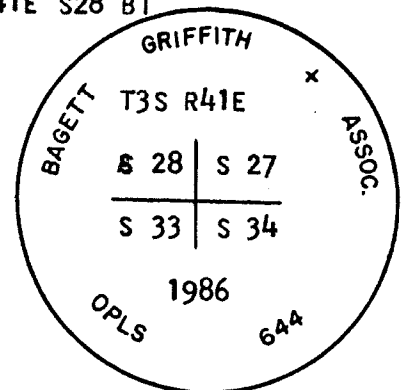

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....

(COUNTY OFFICIAL)

(DEPUTY)