


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

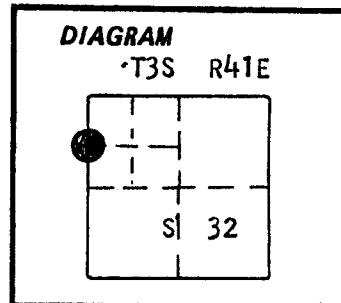

Description of corner evidence found:

NONE

**UNION COUNTY SURVEYOR**

---

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ, DEPUTY

File No. 228-86 R

See map of survey number 29-86 filed in the office of the Union County Surveyor  
 Description of monument and accessories established to perpetuate the  
 original location of this corner: At position determined by survey, I set a 2 1/2" x 30"  
 aluminum pipe with aluminum cap marked as shown, 28 inches in the ground,  
 from which:


A 9 inch Tamarack bears N 79° E, 8.62 feet, marked N 1/16 S 31 BT.

A 10 inch Tamarack bears S 22° W, 16.31 feet, marked N 1/16 S32 BT.

Set a steel fence post approximately 5 feet South with a 54-2 and 54-9 sign attached.

Corner set; 9/11/86

Witness: Greg Blackman, Rick Robinson

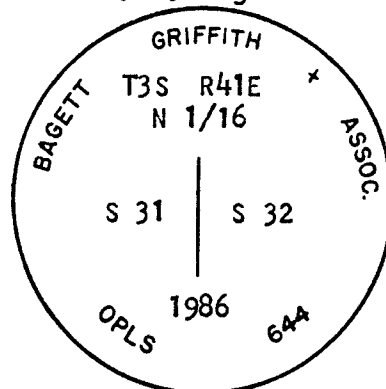

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

Brass washer marked OPLS 644 nailed to BT blaze.  
 Used steel tape and magnetic compass with 20° East  
 declination. Distances to the BTs are to a 50d  
 spike set in right side of tree when facing tree,  
 unless otherwise stated.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 3 S., R. 41 E., Willamette Meridian, Oregon

FEET

(Restoring the survey by Alonzo Gesner in 1898)

From the sec. cor. of secs. 29, 30, 31, and 32, remonumented by Griffith in 1986, recovered and utilized by Griffith in 1988, and by Blackman in 1988; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S	R 41 E
S 30	S 29
S 31	S 32
1986	

from which the remains of an original bearing tree

A dead and down rotted fir log, size indeterminate, bears S. 55 1/2° W., 17.8 ft. dist., no marks visible.

and bearing trees mkd. by Griffith

A rotted fir stump, 12 ins. diam., bears N. 43° E., 30.6 ft. dist., no marks visible.

A tamarack, 17 ins. diam., bears S. 59° E., 23.4 ft. dist., with a healed blaze.

A tamarack, 12 ins. diam., bears S. 65° W., 25.6 ft. dist., with a healed blaze.

A tamarack, 11 ins. diam., bears N. 57° W., 19.5 ft. dist., with a healed blaze.

and a bearing tree mkd. by person(s) unknown

A lodgepole pine, 15 ins. diam., bears N. 53° W., 3.1 ft. dist., with a rotted blaze, no scribing visible.

and a new bearing tree

A fir, 5 ins. diam., bears N. 10 1/2° E., 29.6 ft. dist., mkd. X at breast height and BT at base.

S. 1° 51' 06" E., bet. secs. 31 and 32.

1017

Dirt road, 14 ft. wide, bears S. 30° E. and N. 30° W.

1306.50

The N 1/16 sec. cor. of secs. 31 and 32, established by Griffith in 1986, recovered and utilized by Griffith in 1988, and is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with aluminum cap, 2 1/2 ins. diam., mkd.

UNION COUNTY  
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] DEPUTY

File No. 191-2613R

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 3 S., R. 41 E., Willamette Meridian, Oregon

FEEET

T 3 S R 41 E  
N 1/16  
S 31 | S 32  
1986

from which bearing trees mkd. by Griffith

A tamarack, 13 ins. diam., bears N. 79° E., 8.6 ft. dist.,  
with a healed blaze.

A tamarack, 12 ins. diam., bears S. 19° W.,  
16.1 ft. dist., with a healed blaze.

Corner is located in barb wire fence, extending N. and S.

S. 1° 50' 14" E., beginning new measurement.

1307.42 The 1/4 sec. cor. of secs. 31 and 32, remonumented by Griffith  
in 1986, recovered and utilized by Griffith in 1988; monumented  
with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with  
surface of ground, in a collar of stone, with aluminum cap,  
2 1/2 ins. diam., mkd.

T 3 S R 41 E  
1/4  
S 31 | S 32  
1986

from which bearing trees mkd. by Griffith

A white fir, 22 ins. diam., bears N. 87 1/2° E.,  
14.4 ft. dist., with healed blazes at waist height and  
the base.

A white fir, 23 ins. diam., bears N. 31° W.,  
18.9 ft. dist., with healed blazes at waist height and  
the base.

The original stone, 19 x 17 x 5 ins., mkd 1/4, was found buried  
alongside to the north of the aluminum pipe.

A metal fence post bears N., 4 ft. from the cor.

S. 0° 23' 17" E., beginning new measurement.

1073 McNeill Road, dirt surface, 13 ft. wide, bears S. 74° E. and  
N. 74° W.

1283.05 The S 1/16 sec. cor. of secs. 31 and 32, established by Blackman  
in 1988, and is accepted as the corner; monumented with an  
aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface  
of ground, with corroded aluminum cap, 2 1/2 ins. diam., mkd.

**UNION COUNTY  
SURVEYOR**

Date Received 3/8/13

Date Filed 3/8/13

By J. G. L. DEWITT

File No. 191-2013R