

CERTIFIED RECORD OF LAND CORNER MONUMENT LOCATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey Number 012-2009

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED


TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" iron pin, with aluminum cap marked as shown, 28" in the ground, from which:

- A 13 inch Douglas Fir bears South 73° East, a distance of 50.10 feet, marked LOT 8 BT.
- A 16 inch Western Larch bears North 73° West, a distance of 9.75 feet, marked LOT 4 BT.

Set a steel fencepost 1 foot South of corner.

I hereby certify that the corner was established on May 29, 2009
Witness: Jeff Hsu, Gregory T. Blackman, Jr., Craig Cox

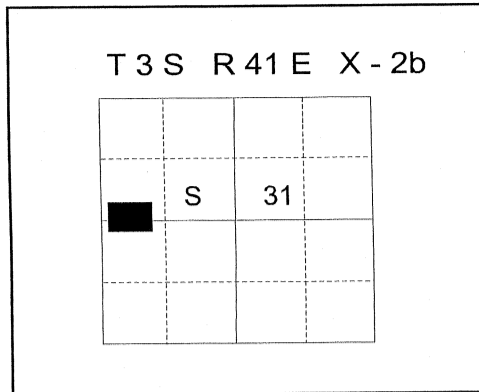

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Rick G. Robinson

OREGON
July 17, 1988
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

BAGETT - GRIFFITH & BLACKMAN

T 43 S R 41 E
S 31
LOT 4 | LOT 5

LOT 9 | LOT 8
2009
OPLS 2219

**UNION COUNTY
SURVEYOR**

Date Received 6/9/09

Date Filed 6/9/09

Filed By Gregory T. Blackman

File Number 012-2009R

I used a magnetic compass and steel tape in the establishment of the accessories. Magnetic Declination is 18° East. I attached a brass washer marked OPLS 2219 to the BT blaze. The distance is to a 60d spike driven into the root crown at the right side of the bearing trees.