


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

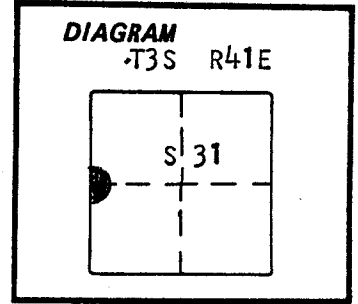

Description of corner evidence found:

NONE

**UNION COUNTY  
SURVEYOR**

---

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGRIZ, DEPUTY

File No. 229-86 R

See survey number 29-86 filed in the office of the Union County Surveyor  
 Description of monument and accessories established to perpetuate the  
 original location of this corner: At position determined by survey, I set a 2 1/2" x 30"  
 aluminum pipe with aluminum cap marked as shown, 22 inches in the ground and  
 raised a mound of stone with a 3 foot base to top of cap, from which;


A 16 inch Tamarack bears N 51° E, 29.10 feet, marked 1/4 S31 BT.

A 12 inch White Fir bears S 35° E, 24.70 feet, marked 1/4 S31 BT.

Set a steel fence post approximately 5 feet North with a 54-9 sign attached.

Corner set; 9/16/86

Witness: Greg Blackman, Rick Robinson

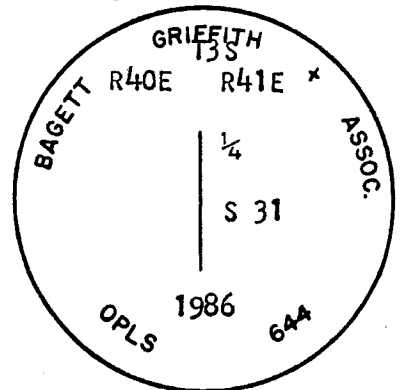

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

Brass washer marked OPLS 644 nailed to BT blaze.  
 Used steel tape and magnetic compass with 20° East  
 declination. Distances to the BTs are to a 50d  
 spike set in right side of tree when facing tree,  
 unless otherwise stated.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)