


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:

Set basalt stone 18x18x5 for 1/4 sec cor from which;

A red fir 16 in diam bears N60°E 9 lks dist
A red fir 16 in diam bears S14°W 23 lks dist

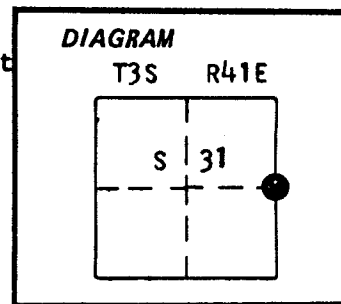

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

Stone 19"x17"x5" 8 inches in the ground marked 1/4 on West face in small mound of stone.

An 18" Red Fir Stump bears N 60° E, 9 lks. no marks visible.

A stump hole bears S 14° W, 23 lks. rotted, no marks visible.

See map of survey number 29-86 filed in the office of the Union County Surveyor Description of monument and accessories established to perpetuate the

original location of this corner: At the stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground and raised a mound of stone with a 3 foot base to top of cap, from which:

A 17 inch White Fir bears S 89° E, 14.46 feet, marked 1/4 S 32 BT.


A 16 inch White Fir bears N 31° W, 18.91 feet, marked 1/4 S 31 BT.

Set a steel fence post approximately 5 feet North with a 54-2 and 54-4 sign attached.

Corner set: 9/3/86

Witness: Greg Blackman, Rick Robinson, Dave Dahlstrom

Buried Stone North

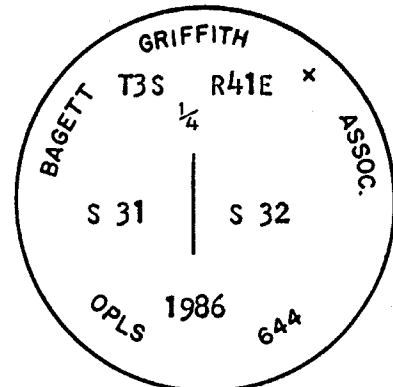

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

UNION COUNTY SURVEYOR

(COUNTY OFFICIAL) (DEPUTY)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ, Deputy

File No. 231-86 R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

Form R6-7100-57 (9/71)

IV-7

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

UNION COUNTY SURVEYOR	
Date Received	<u>3/8/13</u>
Date Filed	<u>3/8/13</u>
By	<u>[Signature]</u>
File No.	<u>192-201312</u>

FEET									
	T 3 S R 41 E N 1/16 S 31 S 32 1986								
	 from which bearing trees mkd. by Griffith A tamarack, 13 ins. diam., bears N. 70° E., 8.6 ft. dist., with a healed blaze. A tamarack, 12 ins. diam., bears S. 19° W., 16.1 ft. dist., with a healed blaze. Corner is located in barb wire fence, extending N. and S. S. 1° 50' 14" E., beginning new measurement. 								
1307.42	The 1/4 sec. cor. of secs. 31 and 32, remonumented by Griffith in 1986, recovered and utilized by Griffith in 1988; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd. <table border="1" style="margin: 10px auto; width: 80%;"> <tr><td colspan="2" style="text-align: center;">T 3 S R 41 E</td></tr> <tr><td colspan="2" style="text-align: center;">1/4</td></tr> <tr><td style="text-align: center;">S 31</td><td style="text-align: center;"> S 32</td></tr> <tr><td colspan="2" style="text-align: center;">1986</td></tr> </table> from which bearing trees mkd. by Griffith A white fir, 22 ins. diam., bears N. 87 1/2° E., 14.4 ft. dist., with healed blazes at waist height and the base. A white fir, 23 ins. diam., bears N. 31° W., 18.9 ft. dist., with healed blazes at waist height and the base. The original stone, 19 x 17 x 5 ins., mkd 1/4, was found buried alongside to the north of the aluminum pipe. A metal fence post bears N., 4 ft. from the cor. S. 0° 23' 17" E., beginning new measurement.	T 3 S R 41 E		1/4		S 31	S 32	1986	
T 3 S R 41 E									
1/4									
S 31	S 32								
1986									
1073	 McNeill Road, dirt surface, 13 ft. wide bears S. 74° E. and N. 74° W. 								
1283.05	 The S 1/16 sec. cor. of secs. 31 and 32, established by Blackman in 1988, and is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, with corroded aluminum cap, 2 1/2 ins. diam., mkd. 								

T3S 41 X05

T3S 41 X05